



DISTRIBUTOR CATALOG

 **Flexfab[®]**

Engineering trust. Around the world.[™]

www.flexfab.com





THE FLEXFAB CREED

VALUE FOR CUSTOMERS:

We believe our first commitment is to our customers. In meeting their needs, everything we do must be of high quality. We must constantly strive to reduce our costs, and improve our quality and productivity. Customers' orders must be serviced promptly and accurately.

QUALITY OF LIFE FOR EMPLOYEES:

We are committed to the general welfare of our employees and the belief that each must be treated as an individual. We must respect their dignity and recognize their merit. There must be a sense of security in their employment and compensation must be fair. Employees must feel free to make suggestions and complaints. Working conditions must be safe, clean, and orderly. There must be equal opportunity for employment, personal development, and advancement for those qualified. The worth of an employee must be recognized by providing challenging work. Adequately trained and educated employees are necessary in maintaining our quality of work life. We must provide competent management, whose responsibility is to accomplish our long term goals and objectives. Their actions must be just and ethical.

SERVICE FOR COMMUNITY:

We are committed to the communities in which we live and work. We must be good citizens by supporting community projects and charities both financially and with time and talents of employees. We must encourage civic improvements and better health and education. We must maintain, in good order, our property and protect the environment and natural resources.

BENEFIT FOR SHAREHOLDERS:

Our final commitment is to our shareholders. The long term viability of the corporation must be assured. New products and capabilities must be developed. New ideas must be encouraged and experimented with. Research must be carried on and innovative programs developed. Facilities and equipment must be properly maintained and replaced when necessary. To meet this commitment, adequate profits are necessary, as well as reserves for adverse times. With a fair price for our products and keeping costs under control, the shareholders will realize a fair return.

Engineering trust. Around the world.™



Engineering trust. Around the world.™

Flexfab GR 4440 44th St, SE, Kentwood, MI 49512, USA.
Phone: 888-353-9323, Fax: 888-353-9344,
www.flexfab.com

All rights reserved. ©2017 Flexfab Horizons International, Inc.

A member of the FH® family of companies.

Flexfab® does not assume any liability for errors or omissions.

ZZZ-34693G - January, 2024



BENEFITS AND APPLICATIONS OF SILICONE RUBBER

WHY USE SILICONE RUBBER WHEN SO MANY OTHER ELASTOMERS ARE AVAILABLE?

STABILITY:

Silicone rubber components have a long life far superior to other elastomers under conditions that would cause those other materials to deteriorate. It has excellent resistance to many chemicals and fluids commonly encountered in service, which is particularly beneficial at temperatures that prevent the use of other materials.

SILICONE'S STRENGTH IN HARSH CONDITIONS:

RELIABILITY:

Silicone rubber consistently offers better performance under normal conditions, but it really shows its strength under the most extreme conditions industry can dish out. No matter the application, silicone rubber is the obvious choice for stability, reliability, and value. Visit Flexfab.com to learn how Flexfab's range of Silicone products can improve your company's systems...and your bottom line.

FLEXFAB SILICONE PRODUCTS:

The uniqueness of silicone rubber provides its users with mechanical, thermal, electrical, and chemical attributes not found in other elastomers. Resistant to hostile environments and damaging elements; strong yet flexible; long service life; are the key ingredients in setting silicone rubber products above the rest.

From flexible hose, ducts and sleeves, to high temperature gaskets, electric heat tapes, conveyor belting, etc..., silicone rubber products have proven to provide above average protection from potentially harmful elements.

SNAPSHOT: FEATURES AND BENEFITS

- Resistant to a wide range of temperatures
- Resistant to hardening, cracking, ozone attack, sunlight
- Resistant to moisture, steam, dust, aging, various pressure ranges
- Resistant to many chemicals
- Retains flexibility in hostile engine environments
- Excellent electrical insulating properties
- Longer life than EPDM (black rubber)



CONTENTS

5515 and 5500 Series 3-Ply Coolant Hose	6-7	7701 Series Fiberglass Reinforced Turbo Sleeves	36-37
5581 and 5501 Series 4-Ply Coolant Hose	8-9	7703 Series Heavy Duty Fiberglass Reinforced Turbo Sleeves	38-39
5415 Series 3-Ply Glossy Coolant Hose	10-11	7851 Series Meta-Aramid Reinforced Turbo Sleeves	40-41
5508 Series Wire Reinforced Coolant Hose	12-13	2563 Series Industrial Sil-fab2™	42-43
3000 Series Coolant Hose Kit	14-15	2005 Series Sil-Fab2™ Wire Reinforced Duct	44-45
5780 Series High Temp Coolant Hose	16-17	7884 and 7896 Series 90° and 45° Elbows	46-47
5526 Series Standard Heater Hose	18-19	7903 Series Reducers	48-49
5521 and 5834 Series Premium Heater Hose	20-21	5531 Series Low Pressure Silicone Tubing	50-51
Specialty Hoses	22-23	36519 Series Beaded Connectors	52-53
5001 Series Heater Hose Repair Kit	24-25	2582 Series Lined Worm Gear Clamps	54-55
Charge Air Connector (CAC): Convolute Reducers	26-27	2584 Series Constant Tension Clamps	56-57
Charge Air Connector (CAC): Hot and Cold Side	28-29	2583 Series T-Bolt Clamps	58-59
Heavy-Wall Charge Air Connector (CAC)	30-31	2588 Series Spring Loaded T-Bolt Clamps	60-61
4000 Series Charge Air Connector Hose and Clamp Kits	32-33	Silicone Dairy Hose	62-63
Large ID Charge Air Connector (CAC)	34-35	Cooling System and Charge Air System General Information	64-65



WHO IS FLEXFAB?

REINFORCED ELASTOMER & THERMOPLASTIC PRODUCTS

SINCE 1961



WE MAKE THE PRODUCTS INDUSTRIES DEPEND ON



WE'RE FOCUSED ON
INNOVATION



We're Committed
To Culture



Global Location



- + Hastings, MI
- + Grand Rapids, MI
- + Nottingham, U.K.
- + Sao Paulo, Brazil
- + Dongguan, China
- + Shanghai, China
- + Leipzig, Germany

Humble HEARTS Values



Honesty Excellence Accountability Respect Teamwork Support



PACCAR



BOEING



SINOTRUK



FAW



PACCAR PARTS



BOEING



IATF 16949:2016
AS9100:D
ISO 9001:2015
ISO 14001:2015



IATF 16949:2016
ISO 9001:2015
ISO 14001:2015



IATF 16949:2016
ISO 9001:2015
ISO 14001:2015



IATF 16949:2016 (English & Chinese)
ISO 14001:2015 (English & Chinese)
ISO 9001:2015 (English & Chinese)
AS9100 (English & Chinese)



5515 AND 5500 SERIES: 3-PLY COOLANT HOSE





To order (3 foot stick) reference part number: FLX5515-300
To order (12 foot stick) reference part number: FLX5515-300x12

Engineered for hostile engine environments, this coolant hose is ideal for extreme temperature and pressure ranges where high performance levels are required. It resists hardening, cracking, cold leaks, aging, and a number of chemicals, making it a durable, long-lasting solution for your applications.

CONSTRUCTION:

- + Silicone hose with 3-ply of polyester reinforcement
- + Available in: 
- + Stocked in 3' lengths
- + 12' lengths also available (call for availability)

SPECIFICATIONS:

- + Meets or exceeds the operating requirements of SAE J20 R1 Class A 
- + Meets or exceeds the operating requirements of TMC RP303B Class I Grade II 
- + Custom wall thickness is .140"/.190"
- + Working pressure is 1/3 of the burst pressure
- + Resists hardening, cracking, cold leaks, aging, and many chemicals
- + Ideal for extreme temperature and various pressure ranges where high performance levels are required

BENEFITS

- ✓ Extreme Temperature Resistance
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ Durable Construction for Various Pressure Ranges
- ✓ Long Life Design

CUSTOM ENGINEERED TO WITHSTAND:



TEMPERATURE RANGE:



5515 AND 5500 SERIES: 3-PLY COOLANT HOSE

Blue Series Part Number	Green Series Part Number	Inside Diameter		Outside Diameter		Actual Burst Pressure - PSI	Burst Pressure - PSI		Weight (LB/FT)	Clamp
		Inch	MM	Inch	MM		SAE J20 R1	TMC		
5515-038	5500-038	0.38	10	0.70	18	500	425	125	0.12	2582-0004
5515-050	5500-050	0.50	13	0.82	21	500	425	125	0.16	2582-0006
5515-062	5500-062	0.63	16	0.95	24	485	425	125	0.20	2582-0010
5515-075	5500-075	0.75	19	1.07	27	475	325	125	0.24	2582-0012
5515-087	5500-087	0.88	22	1.20	30	465	300	125	0.28	2582-0012
5515-100	5500-100	1.00	25	1.32	34	450	300	125	0.32	2582-0016
5515-112	5500-112	1.13	29	1.45	37	435	300	125	0.36	2582-0016 or 2584-0175
5515-125	5500-125	1.25	32	1.57	40	425	275	125	0.40	2582-0020 or 2584-0175
5515-138	5500-138	1.38	35	1.70	43	400	250	125	0.44	2582-0020 or 2584-0212
5515-150	5500-150	1.50	38	1.82	46	375	250	125	0.48	2582-0024 or 2584-0212
5515-162	5500-162	1.63	41	1.95	50	350	225	125	0.52	2582-0024 or 2584-0212
5515-175	5500-175	1.75	44	2.07	53	300	225	125	0.56	2582-0028 or 2584-0262
5515-187	5500-187	1.88	48	2.20	56	250	200	100	0.60	2582-0032 or 2584-0262
5515-200	5500-200	2.00	51	2.32	59	250	200	100	0.64	2582-0032 or 2584-0262
5515-212	5500-212	2.13	54	2.45	62	235	175	100	0.68	2582-0032 or 2584-0262
5515-225	5500-225	2.25	57	2.57	65	225	175	100	0.72	2582-0036 or 2584-0312
5515-238	5500-238	2.38	60	2.70	69	210	150	100	0.76	2582-0040 or 2584-0312
5515-250	5500-250	2.50	64	2.82	72	200	150	100	0.80	2582-0040 or 2584-0312
5515-262	5500-262	2.63	67	2.95	75	200	125	100	0.84	2582-0040 or 2584-0312
5515-275	5500-275	2.75	70	3.07	78	200	125	100	0.88	2582-0044 or 2584-0362
5515-287	5500-287	2.88	73	3.20	81	200	100	100	0.92	2582-0044 or 2584-0362
5515-300	5500-300	3.00	76	3.32	84	200	100	100	0.96	2582-0048 or 2584-0362
5515-312	5500-312	3.13	80	3.45	88	175	75	100	1.00	2582-0048 or 2584-0362
5515-325	5500-325	3.25	83	3.57	91	175	75	100	1.04	2582-0052 or 2584-0412
5515-338	5500-338	3.38	86	3.70	94	150	75	100	1.08	2582-0052 or 2584-0412
5515-350	5500-350	3.50	89	3.82	97	150	75	100	1.12	2582-0056 or 2584-0412
5515-375	5500-375	3.75	95	4.07	103	135	50	100	1.20	2582-0060 or 2584-0412
5515-400	5500-400	4.00	102	4.32	110	125	50	100	1.28	2582-0064 or 2584-0462
5515-450	5500-450	4.50	114	4.82	122	100	N/A	N/A	1.44	2582-0072 or 2584-0512
5515-500	5500-500	5.00	127	5.32	135	90	N/A	N/A	1.60	2584-0562
5515-550	5500-550	5.50	140	5.82	148	75	N/A	N/A	1.76	2584-0612
5515-600	5500-600	6.00	152	6.32	161	75	N/A	N/A	1.92	2584-0662

*Specifications for reference only. Specific test data available on request.



5581 AND 5501 SERIES: 4-PLY COOLANT HOSE

To order (3 foot stick) reference part number: FLX5581-300
To order (12 foot stick) reference part number: FLX5581-300x12





Put this 4-ply silicone polyester coolant hose to work in your extreme temperature and pressure range environments. You'll find its reliable construction resists many of the issues other hoses present, including hardening, cracking, and aging. Ideal for diesel powered city transit, school buses, and refuse vehicles.

CONSTRUCTION:

- + Silicone hose with 4-plyes of polyester reinforcement
- + Available in: 
- + Stocked in 3' lengths
- + 12' lengths also available (call for availability)

SPECIFICATIONS:

- + Meets or exceeds the operating requirements of SAE J20 R1 Class A 
- + Meets or exceeds the operating requirements of TMC RP303B Class I Grade II 
- + Standard wall thickness is .170"/.220"
- + Working pressure is 1/3 of the burst pressure
- + Resists hardening, cracking, cold leaks, aging, and many chemicals
- + Ideal for extreme temperature and various pressure ranges where high performance levels are required
- + Ideal for diesel powered city transit, school buses, and refuse vehicles

BENEFITS


- ✓ Extreme Temperature Resistance
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ Durable Construction for Various Pressure Ranges
- ✓ Long Life Design

CUSTOM ENGINEERED TO WITHSTAND:



TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



5581 AND 5501 SERIES: 4-PLY COOLANT HOSE

Blue Series Part Number	Green Series Part Number	Inside Diameter		Outside Diameter		Actual Burst Pressure - PSI	Burst Pressure - PSI		Weight (LB/FT)	Clamp
		Inch	MM	Inch	MM		SAE J20 R1	TMC		
5581-038	5501-038	0.38	10	0.77	20	600	425	125	0.16	2582-0006
5581-050	5501-050	0.50	13	0.89	23	600	425	125	0.20	2582-0008
5581-062	5501-062	0.63	16	1.02	26	585	425	125	0.24	2582-0010
5581-075	5501-075	0.75	19	1.14	29	575	335	125	0.29	2582-0012
5581-087	5501-087	0.88	22	1.27	32	560	300	125	0.34	2582-0016
5581-100	5501-100	1.00	25	1.39	35	550	300	125	0.39	2582-0016 or 2584-0175
5581-112	5501-112	1.13	29	1.52	39	525	300	125	0.44	2582-0020 or 2584-0175
5581-125	5501-125	1.25	32	1.64	42	500	275	125	0.49	2582-0020 or 2584-0212
5581-138	5501-138	1.38	35	1.77	45	475	250	125	0.54	2582-0024 or 2584-0212
5581-150	5501-150	1.50	38	1.89	48	450	250	125	0.59	2582-0024 or 2584-0212
5581-162	5501-162	1.63	41	2.02	51	425	225	125	0.63	2582-0028 or 2584-0262
5581-175	5501-175	1.75	44	2.14	54	400	225	125	0.68	2582-0028 or 2584-0262
5581-187	5501-187	1.88	48	2.27	58	400	200	100	0.73	2582-0032 or 2584-0262
5581-200	5501-200	2.00	51	2.39	61	400	200	100	0.78	2582-0032 or 2584-0262
5581-212	5501-212	2.13	54	2.52	64	375	175	100	0.83	2582-0036 or 2584-0312
5581-225	5501-225	2.25	57	2.64	67	350	175	100	0.88	2582-0036 or 2584-0312
5581-238	5501-238	2.38	60	2.77	70	325	150	100	0.93	2582-0040 or 2584-0312
5581-250	5501-250	2.50	64	2.89	73	300	150	100	0.98	2582-0040 or 2584-0312
5581-262	5501-262	2.63	67	3.02	77	285	125	100	1.02	2582-0044 or 2584-0362
5581-275	5501-275	2.75	70	3.14	80	275	125	100	1.07	2582-0044 or 2584-0362
5581-287	5501-287	2.88	73	3.27	83	250	100	100	1.12	2582-0048 or 2584-0362
5581-300	5501-300	3.00	76	3.39	86	250	100	100	1.17	2582-0048 or 2584-0362
5581-312	5501-312	3.13	80	3.52	89	225	75	100	1.22	2582-0052 or 2584-0412
5581-325	5501-325	3.25	83	3.64	92	225	75	100	1.27	2582-0052 or 2584-0412
5581-338	5501-338	3.38	86	3.77	96	200	75	100	1.32	2582-0056 or 2584-0412
5581-350	5501-350	3.50	89	3.89	99	200	75	100	1.37	2582-0056 or 2584-0412
5581-375	5501-375	3.75	95	4.14	105	175	50	100	1.46	2582-0060 or 2584-0462
5581-400	5501-400	4.00	102	4.39	112	150	50	100	1.56	2582-0064 or 2584-0462
5581-425	5501-425	4.25	108	4.64	118	150	40	N/A	1.65	2582-0072 or 2584-0512
5581-450	5501-450	4.50	114	4.89	124	150	N/A	N/A	1.76	2582-0072 or 2584-0512
5581-500	5501-500	5.00	127	5.39	137	125	N/A	N/A	1.95	2584-0562
5581-550	5501-550	5.50	140	5.89	150	100	N/A	N/A	2.16	2584-0612

*Specifications for reference only. Specific test data available on request.




5415 SERIES:



3-PLY GLOSSY COOLANT HOSE

Ideal for high-performance environments where oil splash is present, Flexfab's 3-ply glossy lined polyester coolant hose stands out for its strength and durability. It won't harden, crack, or leak, and resists aging, a range of chemicals, ozone, and UV rays.

CONSTRUCTION:

- + Silicone hose with 3-ply of polyester reinforcement
- + Available in: 
- + Stocked in 3' lengths

SPECIFICATIONS:

- + Meets or exceeds the operating requirements of SAE J20 R1 Class A 
- + Meets or exceeds the operating requirements of TMC RP303B Class I Grade II 
- + Standard wall thickness is .140"/.190"
- + Working pressure is 1/3 of the burst pressure
- + Resists hardening, cracking, cold leaks, aging, and many chemicals
- + Ideal for extreme temperature and various pressure ranges where high performance levels are required


BENEFITS

- ✓ Extreme Temperature Resistance
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ Durable Construction for Various Pressure Ranges
- ✓ Glossy Exterior Ideal Where Oil Splash is Present

CUSTOM ENGINEERED TO WITHSTAND:



TEMPERATURE RANGE:



5415 SERIES: 3-PLY GLOSSY COOLANT HOSE

Part Number	Inside Diameter		Outside Diameter		Actual Burst Pressure - PSI	Burst Pressure - PSI		Weight (LB/FT)	Clamp
	Inch	MM	Inch	MM		SAE J20 R1	TMC		
5415-038	0.38	10	0.70	18	500	425	125	0.12	2582-0004
5415-050	0.50	13	0.82	21	500	425	125	0.16	2582-0006
5415-063	0.63	16	0.95	24	485	425	125	0.20	2582-0010
5415-075	0.75	19	1.07	27	475	325	125	0.24	2582-0012
5415-087	0.88	22	1.20	30	465	300	125	0.28	2582-0012
5415-100	1.00	25	1.32	34	450	300	125	0.32	2582-0016
5415-112	1.13	29	1.45	37	435	300	125	0.36	2582-0016 or 2584-0175
5415-125	1.25	32	1.57	40	425	275	125	0.40	2582-0020 or 2584-0175
5415-138	1.38	35	1.70	43	400	250	125	0.44	2582-0020 or 2584-0212
5415-150	1.50	38	1.82	46	375	250	125	0.48	2582-0024 or 2584-0212
5415-162	1.63	41	1.95	50	350	225	125	0.52	2582-0024 or 2584-0212
5415-175	1.75	44	2.07	53	300	225	125	0.56	2582-0028 or 2584-0262
5415-187	1.88	48	2.20	56	250	200	100	0.60	2582-0032 or 2584-0262
5415-200	2.00	51	2.32	59	250	200	100	0.64	2582-0032 or 2584-0262
5415-212	2.13	54	2.45	62	235	175	100	0.68	2582-0032 or 2584-0262
5415-225	2.25	57	2.57	65	225	175	100	0.72	2582-0036 or 2584-0312
5415-238	2.38	60	2.70	69	210	150	100	0.76	2582-0040 or 2584-0312
5415-250	2.50	64	2.82	72	200	150	100	0.80	2582-0040 or 2584-0312
5415-262	2.63	67	2.95	75	200	125	100	0.84	2582-0040 or 2584-0312
5415-275	2.75	70	3.07	78	200	125	100	0.88	2582-0044 or 2584-0362
5415-287	2.88	73	3.20	81	200	100	100	0.92	2582-0044 or 2584-0362
5415-300	3.00	76	3.32	84	200	100	100	0.96	2582-0048 or 2584-0362
5415-312	3.13	80	3.45	88	175	75	100	1.00	2582-0048 or 2584-0362
5415-325	3.25	83	3.57	91	175	75	100	1.04	2582-0052 or 2584-0412
5415-338	3.38	86	3.70	94	150	75	100	1.08	2582-0052 or 2584-0412
5415-350	3.50	89	3.82	97	150	75	100	1.12	2582-0056 or 2584-0412
5415-375	3.75	95	4.07	103	135	50	100	1.20	2582-0060 or 2584-0412
5415-387	3.88	99	4.20	107	125	50	100	1.24	2582-0060 or 2584-0462
5415-400	4.00	102	4.32	110	125	50	100	1.28	2582-0064 or 2584-0462
5415-450	4.50	114	4.82	122	100	N/A	N/A	1.44	2582-0072 or 2584-0512
5415-500	5.00	127	5.32	135	90	N/A	N/A	1.60	2584-0562
5415-550	5.50	140	5.82	148	75	N/A	N/A	1.76	2584-0612
5415-600	6.00	152	6.32	161	75	N/A	N/A	1.92	2584-0662

*Specifications for reference only. Specific test data available on request.



5508 SERIES:

WIRE REINFORCED COOLANT HOSE

Kit Includes 1 Hose & 2 Clamps




This coolant hose is reinforced with two plies of polyester reinforcement, with helical wire that allows for some forced curvature. This design makes it an ideal solution for heavy duty pressure connections in hostile engine environments.

CONSTRUCTION:

- + Silicone hose with 2-ply of polyester reinforcement, with helical wire
- + Available in: 
- + Stocked in 3' lengths
- + 12' lengths also available (call for availability)

SPECIFICATIONS:

- + Meets or exceeds the operating requirements of SAE J20 R2 Class A 
- + Wall thickness at Hose ends exclusive of Wire Gauge .130"/.180"
- + Working pressure is 1/3 of the burst pressure
- + Negative pressure is -10 PSI

BENEFITS

- ✓ Extreme Temperature Resistance
- ✓ Helical Wire Construction
- ✓ Withstand Vacuum Pressures
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ Engineered for Heavy Duty Pressure Connections
- ✓ Wire Reinforced Coolant Hoses are Designed to Handle Vacuum and/or Some Forced Curvature

CUSTOM ENGINEERED TO WITHSTAND:



TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



5508 SERIES: WIRE REINFORCED COOLANT HOSE

Part Number	Inside Diameter		Outside Diameter		Burst Pressure PSI	Max Neg. PSI	Bend Radius (Inch)	Weight (LB/FT)
	Inch	MM	Inch	MM				
5508-060	0.50	13	0.92	23	600	10	2.00	0.17
5508-062	0.63	16	1.05	27	600	10	2.25	0.21
5508-075	0.75	19	1.17	30	600	10	2.50	0.23
5508-087	0.88	22	1.30	33	550	10	2.75	0.26
5508-100	1.00	25	1.42	36	550	10	3.00	0.30
5508-125	1.25	32	1.67	42	525	10	3.50	0.36
5508-150	1.50	38	1.92	49	500	10	4.00	0.43
5508-175	1.75	44	2.17	55	475	10	4.50	0.51
5508-200	2.00	51	2.42	61	450	10	5.00	0.56
5508-225	2.25	57	2.67	68	400	10	5.50	0.65
5508-250	2.50	64	2.92	74	350	10	6.00	0.74
5508-275	2.75	70	3.17	81	325	10	6.50	0.79
5508-300	3.00	76	3.42	87	300	10	7.00	0.85
5508-350	3.50	89	3.92	100	275	10	8.00	1.09
5508-400	4.00	102	4.42	112	250	10	9.00	1.19
5508-600	6.00	152	6.42	163	125	10	13.00	1.84

*Specifications for reference only. Specific test data available on request.



3000 SERIES: COOLANT HOSE KITS

Kit Includes 1 Hose & 2 Clamps





At 1' length, Flexfab's 3000 series coolant hose and clamp kits are convenient for on the go use. Engineered for hostile engine environments, this coolant hose is ideal for extreme temperature and pressure ranges where high performance levels are required. Silicone resists hardening, cracking, cold leaks, aging, and a number of chemicals, making it a durable, long-lasting solution for your applications.

CONSTRUCTION:

- + Silicone hose with 3 plies of polyester reinforcement
- + Available in: 
- + Stocked in 1' lengths

SPECIFICATIONS:

- + Meets or exceeds the operating requirements of SAE J20 R1 Class A 
- + Meets or exceeds the operating requirements of TMC RP303B Class I Grade II 
- + Custom wall thickness is .140"/.190"
- + Working pressure is 1/3 of the burst pressure
- + Resists hardening, cracking, cold leaks, aging, and many chemicals
- + Ideal for extreme temperature and various pressure ranges where high performance levels are required

BENEFITS


- ✓ Extreme Temperature Resistance
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ Durable Construction for Various Pressure Ranges
- ✓ Long Life Design

CUSTOM ENGINEERED TO WITHSTAND:



TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



3000 SERIES: COOLANT HOSE KITS

Part Number	Hose and Clamp Provided in Kit	Hose Length Inch	Inside Diameter		Outside Diameter		Actual Burst Pressure PSI	Burst Pressure PSI		Weight (LB)
			Inch	MM	Inch	MM		SAE J20 R1	TMC	
KIT3001	5515-200	12	2	51	2.32	59	250	200	100	0.64
	2584-0262	N/A	1.75 - 2.63	45 - 67	N/A	N/A	N/A	N/A	N/A	0.2
KIT3002	5515-225	12	2.25	57	2.57	65	225	175	100	0.72
	2584-0312	N/A	2.25 - 3.13	57 - 79	N/A	N/A	N/A	N/A	N/A	0.2
KIT3003	5515-250	12	2.5	64	2.82	72	200	150	100	0.8
	2584-0312	N/A	2.25 - 3.13	57 - 79	N/A	N/A	N/A	N/A	N/A	0.2
KIT3004	5515-300	12	3	76	3.32	84	200	100	100	0.96
	2584-0362	N/A	2.75 - 3.63	70 - 92	N/A	N/A	N/A	N/A	N/A	0.2



5780 SERIES:

HIGH TEMP COOLANT HOSE



Our high temperature coolant hose features a thicker wall that offers higher pressure handling than standard hoses. Strong and reliable, it withstands the hardening, cracking, and leaks that can be present in hostile engine environments. Plus, it's resistant to aging and chemicals, including coolant additives.

CONSTRUCTION:

- + Silicone
- + Meta-Aramid
- + 4-Ply
- + Available in various standard lengths*

SPECIFICATIONS:

- + Meets or exceeds SAE J20 R1 H.T. ✓
- + Standard wall thickness available in 3/8" - 2 1/2" diameter
- + Heavy wall thickness available in 2 5/8" - 6" diameter
- + Extreme pressure resistance up to 175 PSIG

BENEFITS


- ✓ Extreme Temperature Resistance
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ Pressure Endurance
- ✓ Available in Various Lengths

CUSTOM ENGINEERED TO WITHSTAND:



TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



5780 SERIES: *HIGH TEMP COOLANT HOSE*

Part Number	Wall Thickness		Inside Diameter		Outside Diameter		Pressure Ratings	
	Min	Max	Inch	MM	Inch	MM	Working (PSI)	Burst (PSI)
5780-038	0.170	0.220	0.38	10	0.77	20	175	600
5780-050	0.170	0.220	0.50	13	0.89	23	175	600
5780-062	0.170	0.220	0.63	16	1.02	26	175	575
5780-075	0.170	0.220	0.75	19	1.14	29	175	575
5780-087	0.170	0.220	0.88	22	1.27	32	150	550
5780-100	0.170	0.220	1.00	25	1.39	35	150	550
5780-112	0.170	0.220	1.13	29	1.52	39	150	500
5780-125	0.170	0.220	1.25	32	1.64	42	150	500
5780-138	0.170	0.220	1.38	35	1.77	45	150	450
5780-150	0.170	0.220	1.50	38	1.89	48	150	450
5780-175	0.170	0.220	1.75	44	2.14	54	125	400
5780-200	0.170	0.220	2.00	51	2.39	61	125	400
5780-225	0.170	0.220	2.25	57	2.64	67	100	350
5780-250	0.170	0.220	2.50	64	2.89	73	100	300
5780-262	0.220	0.279	2.63	67	3.13	79	80	275
5780-275	0.220	0.279	2.75	70	3.25	83	80	275
5780-300	0.220	0.279	3.00	76	3.50	89	80	250
5780-600	0.220	0.279	6.00	152	6.50	165	30	100




5526 SERIES:

STANDARD HEATER HOSE





Engineered with superior flexibility and durability, Flexfab's standard heater hose is resistant to coolant additives, as well as hardening, cracking, cold leaks, and aging. It's extreme duty cycle tested.

CONSTRUCTION:

- + Silicone hose with 1-ply of nylon fiber reinforcement
- + Available in: 
- + Stocked in 25' and 50' boxes
- + Available in longer lengths on standard wooden spools*
 - *Continuous lengths are not guaranteed, if continuous lengths are required please contact a sales rep for price and availability

SPECIFICATIONS:

- + Meets or exceeds the operating requirements of SAE J20 R3 Class A 
- + Meets or exceeds the operating requirements of TMC RP303B Class I Grade II 
- + Standard wall thickness is .140"/.170"
- + Working pressure is 1/3 of the burst pressure
- + Bend radius is 5 times the ID of the hose
- + Resists hardening, cracking, cold leaks, aging, and many chemicals

BENEFITS

- ✓ Box and Spool Lengths Available
- ✓ Extreme Temperature Resistance
- ✓ Superior Flexibility
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ Durable Construction
- ✓ Resistant to Coolant Additives

CUSTOM ENGINEERED TO WITHSTAND:



TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



5526 SERIES: STANDARD HEATER HOSE

Part Number	Inside Diameter		Outside Diameter		Actual Burst Pressure - PSI	Burst Pressure - PSI		Weight (LB/FT)	Overall Length (Feet)	Clamp
	Inch	MM	Inch	MM		SAE J20 R1	TMC			
5526-025x25	0.25	6	0.58	15	320	250	125	0.111	25' Box	2582-0004
5526-025x50	0.25	6	0.58	15	320	250	125	0.111	50' Box	2582-0004
5526-025x250	0.25	6	0.58	15	320	250	125	0.111	250' Spool	2582-0004
5526-025x800	0.25	6	0.58	15	320	250	125	0.111	800' Spool	2582-0004
5526-031x25	0.31	8	0.64	16	310	250	125	0.128	25' Box	2582-0006
5526-031x50	0.31	8	0.64	16	310	250	125	0.128	50' Box	2582-0006
5526-031x600	0.31	8	0.64	16	310	250	125	0.128	600' Spool	2582-0006
5526-038x25	0.38	10	0.71	18	310	250	125	0.145	25' Box	2582-0006
5526-038x50	0.38	10	0.71	18	310	250	125	0.145	50' Box	2582-0006
5526-038x250	0.38	10	0.71	18	310	250	125	0.145	250' Spool	2582-0006
5526-038x500	0.38	10	0.71	18	310	250	125	0.145	500' Spool	2582-0006
5526-050x25	0.50	13	0.83	21	310	250	125	0.181	25' Box	2582-0006
5526-050x50	0.50	13	0.83	21	310	250	125	0.181	50' Box	2582-0006
5526-050x250	0.50	13	0.83	21	310	250	125	0.181	250' Spool	2582-0006
5526-050x500	0.50	13	0.83	21	310	250	125	0.181	500' Spool	2582-0006
5526-062x25	0.63	16	0.96	24	300	250	125	0.216	25' Box	2582-0008
5526-062x50	0.63	16	0.96	24	300	250	125	0.216	50' Box	2582-0008
5526-062x250	0.63	16	0.96	24	300	250	125	0.216	250' Spool	2582-0008
5526-062x400	0.63	16	0.96	24	300	250	125	0.216	400' Spool	2582-0008
5526-075x25	0.75	19	1.08	27	300	200	125	0.25	25' Box	2582-0010
5526-075x50	0.75	19	1.08	27	300	200	125	0.25	50' Box	2582-0010
5526-075x250	0.75	19	1.08	27	300	200	125	0.25	250' Spool	2582-0010
5526-075x300	0.75	19	1.08	27	300	200	125	0.25	300' Spool	2582-0010
5526-087x25	0.88	22	1.21	31	250	175	125	0.287	25' Box	2582-0012
5526-087x50	0.88	22	1.21	31	250	175	125	0.287	50' Box	2582-0012
5526-087x200	0.88	22	1.21	31	250	175	125	0.287	200' Spool	2582-0012
5526-100x25	1.00	25	1.33	34	250	175	125	0.334	25' Box	2582-0016
5526-100x50	1.00	25	1.33	34	250	175	125	0.334	50' Box	2582-0016
5526-100x200	1.00	25	1.33	34	250	175	125	0.334	200' Spool	2582-0016
5526-125x25	1.25	32	1.58	40	200	175	125	0.385	25' Box	2582-0020
5526-125x50	1.25	32	1.58	40	200	175	125	0.385	50' Box	2582-0020
5526-125x150	1.25	32	1.58	40	200	175	125	0.385	150' Spool	2582-0020

*Specifications for reference only. Specific test data available on request





5521 AND 5834 SERIES:

PREMIUM HEATER HOSE





Our premium heater hose features a thicker wall that offers higher pressure handling than standard hoses. Strong and reliable, it withstands the hardening, cracking, and leaks that can be present in hostile engine environments. Plus, it's resistant to aging and chemicals, including coolant additives.

CONSTRUCTION:

- + 5521 Series: silicone hose with 1-ply of nylon fiber reinforcement. Green cover, red liner
- + Available in: 
- + 5834 Series: silicone hose with 1-ply of para-aramid fiber reinforcement. Blue cover, red liner
- + Available in: 
- + Stocked in 25' and 50' boxes
- + Available in longer lengths on standard wooden spools*
 - *Continuous lengths are not guaranteed, if continuous lengths are required please contact a sales rep for price and availability

SPECIFICATIONS:

- + Meets or exceeds the operating requirements of SAE J20 R3 Class A 
- + Meets or exceeds the operating requirements of TMC RP303B Class I Grade II 
- + Standard wall thickness is .170"/.220"
- + Working pressure is 1/3 of the burst pressure
- + Resists hardening, cracking, cold leaks, aging, and many chemicals

BENEFITS

- ✓ Box and Spool Lengths*
- ✓ Extreme Temperature Resistance
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ Superior Flexibility
- ✓ Bend Radius is 5 x ID
- ✓ Durable Construction
- ✓ Resistant to Coolant Additives
- ✓ Pressure Endurance
- ✓ Thicker Wall Offers Higher Pressure Handling

CUSTOM ENGINEERED TO WITHSTAND:



TEMPERATURE RANGE:

*Inside & Outside Hose Temperature



5521 SERIES: PREMIUM HEATER HOSE (GREEN)

Part Number	Inside Diameter		Outside Diameter		Actual Burst Pressure - PSI	Burst Pressure - PSI		Weight (LB/FT)	Overall Length (Feet)	Clamp
	Inch	MM	Inch	MM		SAE J20 R1	TMC			
5521-025x25	0.25	6	0.64	16	475	475	125	0.121	25' Box	2582-0006
5521-025x50	0.25	6	0.64	16	475	475	125	0.121	50' Box	2582-0006
5521-025x800	0.25	6	0.64	16	475	475	125	0.121	800' Spool	2582-0006
5521-031x25	0.31	8	0.70	18	475	475	125	0.151	25' Box	2582-0006
5521-031x50	0.31	8	0.70	18	475	475	125	0.151	50' Box	2582-0006
5521-031x600	0.31	8	0.70	18	475	475	125	0.151	600' Spool	2582-0006
5521-038x25	0.38	10	0.77	20	475	475	125	0.181	25' Box	2582-0006
5521-038x50	0.38	10	0.77	20	475	475	125	0.181	50' Box	2582-0006
5521-038x500	0.38	10	0.77	20	475	475	125	0.181	500' Spool	2582-0006
5521-050x25	0.50	13	0.89	23	425	425	125	0.226	25' Box	2582-0006
5521-050x50	0.50	13	0.89	23	425	425	125	0.226	50' Box	2582-0006
5521-050x500	0.50	13	0.89	23	425	425	125	0.226	500' Spool	2582-0006
5521-062x25	0.63	16	1.02	26	375	375	125	0.258	25' Box	2582-0010
5521-062x50	0.63	16	1.02	26	375	375	125	0.258	50' Box	2582-0010
5521-062x400	0.63	16	1.02	26	375	375	125	0.258	400' Spool	2582-0010
5521-075x25	0.75	19	1.14	29	325	325	125	0.301	25' Box	2582-0012
5521-075x50	0.75	19	1.14	29	325	325	125	0.301	50' Box	2582-0012
5521-075x300	0.75	19	1.14	29	325	325	125	0.301	300' Spool	2582-0012
5521-087x25	0.88	22	1.27	32	300	300	125	0.346	25' Box	2582-0012
5521-087x50	0.88	22	1.27	32	300	300	125	0.346	50' Box	2582-0012
5521-087x150	0.88	22	1.27	32	300	300	125	0.346	150' Spool	2582-0012
5521-100x25	1.00	25	1.39	35	300	300	125	0.391	25' Box	2582-0016
5521-100x50	1.00	25	1.39	35	300	300	125	0.391	50' Box	2582-0016
5521-100x200	1.00	25	1.39	35	300	300	125	0.391	200' Spool	2582-0016
5521-125x25	1.25	32	1.64	42	200	275	125	0.491	25' Box	2582-0020
5521-125x50	1.25	32	1.64	42	200	275	125	0.491	50' Box	2582-0020
5521-125x150	1.25	32	1.64	42	200	275	125	0.491	150' Spool	2582-0020

*Specifications for reference only. Specific test data available on request.

5934 SERIES: PREMIUM HEATER HOSE (BLUE)

Part Number	Inside Diameter		Outside Diameter		Actual Burst Pressure - PSI	Burst Pressure - PSI		Weight (LB/FT)	Overall Length (Feet)	Clamp
	Inch	MM	Inch	MM		SAE J20 R1	TMC			
5934-112x25	1.13	29	1.52	38	250	275	125	0.438	25' Box	2582-0020
5934-112x50	1.13	29	1.52	38	250	275	125	0.438	50' Box	2582-0020
5934-112x150	1.13	29	1.52	38	250	275	125	0.438	150' Spool	2582-0020

*Specifications for reference only. Specific test data available on request.



SPECIALTY HOSES:



Designed for unique applications, Flexfab's specialty hoses are durable, long lasting, and built to withstand extreme temperature environments. Their maximum operating pressure ranges from 30 PSI for the coolant sleeve to 55 PSI for the charge air 45° elbow.

A. 7730-0001: Coolant Sleeve

- + Specially designed coolant hose for unique applications. Sales should be consulted before use in new applications as pressure ratings are very specific.
- + Hose can also be used for a cold side charge air-cooler application
- + 4-ply polyester reinforced hose
- + Maximum operating pressure is 30 PSI
- + Temperature range is -65°F (-54°C) to +350°F (+177°C)

CUSTOM ENGINEERED TO WITHSTAND:




B. 7967: Coolant Bellows

- + Meets or exceeds the operating requirements of SAE J20 R1 Class A ✓
- + Once installed, the hose can handle up to 1.00" of lateral movement in the application
- + 3-Ply Polyester reinforced hose
- + Maximum operating pressure is 50 PSI
- + Temperature range is -65°F (-54°C) to +350°F (+177°C)

CUSTOM ENGINEERED TO WITHSTAND:



C. 7965: Coolant Elbow

- + Meets or exceeds the operating requirements of SAE J20 R1 Class A 
- + Used for a 90° coolant connection between pipes
- + Tighter bend radius than most other 90° elbows
- + 4-ply polyester reinforced hose
- + Maximum operating pressure is 50 PSI
- + Temperature range is -65°F (-54°C) to +350°F (+177°C)

CUSTOM ENGINEERED TO WITHSTAND:



D. 7902: Charge Air 45° Elbow

- + Used for a 45° hot side charge air connection between pipes
- + 6-ply meta-aramid reinforced hose
- + Maximum operating pressure is 55 PSI
- + Temperature range is - 65°F (54°C) to +450°F (+232°C)

CUSTOM ENGINEERED TO WITHSTAND:



SPECIALTY HOSES:

Part Number	Inside Diameter		Outside Diameter		Overall Length Inches	Stainless Steel Rings	Burst Pressure - PSI	Weight LBS	Clamp
	Inch	MM	Inch	MM					
A. 7730-0001	3.00	76	3.23	82	6.00	No	90	0.5	2582-0043 or 2584-0382
B. 7967	2.50	64	2.82	72	8.50	Yes	150	0.5	2582-0040 or 2584-0312
C. 7965	2.50	64	2.92	74	10.00	No	150	0.5	2582-0040 or 2584-0312
D. 7902	3.50/4.00	89/102	4.13/4.67	106/119	8.75	No	165	0.5	2583-0350 or 2583-0400

*Specifications for reference only. Specific test data available on request.



5001 SERIES:

Kit Includes 1 Beaded Connector and 2 Clamps



Reduce engine downtime and make quick repairs on the road with this heater hose repair kit. The kit contains 300-grade stainless steel lined worm gear clamps, 5/16" clamp head, and 9/16" clamp band.

CONSTRUCTION:

- + Anodized aluminum construction
- Corrosion resistance

SPECIFICATIONS:

- + Bead height per AS5131 specification
- + Meets anodized aluminum specification MIL-A8625 ✓
- + 300 grade stainless steel lined worm gear clamps
- + Clamp hex head 5/16"
- + Clamp band width 9/16"

BENEFITS

- ✓ Quick Repairs on the Road
 - Reduce Engine Downtime
- ✓ Lasts Until Next Service

5001 SERIES: HEATER HOSE REPAIR KIT

Part Number	Connector and Clamp Provided in Kit	Outside Diameter		Bead Height (AS5131)	Overall Length (Feet)	Use With
		Inch	MM			
KIT5001D	DEA-36519-0625	0.63	16	.047-.087	3.00	SS26-063
	FLX2582-0008	N/A	N/A	N/A	N/A	-
KIT5002D	DEA-36519-0750	0.75	19	.047-.087	3.00	SS26-075
	FLX2582-0010	N/A	N/A	N/A	N/A	-
KIT5003D	DEA-36519-1000	1.00	25	.047-.087	3.00	SS26-100
	FLX2582-0016	N/A	N/A	N/A	N/A	-

*Specifications for reference only



CHARGE AIR CONNECTOR (CAC)

CONVOLUTED REDUCERS



Get great value with Flexfab's charge air convoluted (CAC) reducers. They can be used on both hot side and cold side of the CAC system and are constructed with 4-ply silicone coated meta-aramid fabric. Custom engineered to withstand harsh environments, they are resistant to extreme temperatures and pressures.

CONSTRUCTION:

+ 4-ply silicone coated meta-aramid fabric with stainless steel pressure retention rings where noted

SPECIFICATIONS:

+ Wall thickness is .092"/.132"

BENEFITS

- ✓ Can be Used on Both Hot Side and Cold Side of the CAC System
- ✓ Extreme Temperature Resistance
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ High Pressure Resistance

CUSTOM ENGINEERED TO WITHSTAND:



COOL TEMPS



HOT TEMPS



OIL SPLASH
RESISTANCE



OZONE
RESISTANT



DIRECT
SUNLIGHT

TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



CHARGE AIR CONNECTOR (CAC) CONVOLUTED REDUCERS

Part Number	Inside Diameter		Outside Diameter		Overall Length Inches	Convolute (Humps)	Stainless Steel Rings	Max Operating Pressure - PSI	Weight LBS	Clamp
	Inch	MM	Inch	MM						
7868	2.50/3.00	64/76	2.73/3.23	69/82	4.00	1	None	40	0.5	2583-0250/2583-0300 2584-0312/2584-0362
7725	3.00/3.50	76/89	3.23/3.73	82/95	5.00	1	2	55	0.5	2583-0300/2583-0350 2584-0362/2584-0412
7766	3.00/4.00	76/102	3.23/4.23	82/107	6.30	1	2	50	0.5	2583-0300/2583-0400 2584-0362/2584-0462
7880	3.50/4.00	89/102	3.73/4.23	95/107	6.00	2	2	50	0.5	2583-0350/2583-0400 2584-0412/2584-0462
7711	4.00/4.50	102/114	4.23/4.73	107/120	6.00	1	None	30	0.5	2583-0400/2583-0450 2584-0462/2584-0512
7866	4.00/4.50	102/114	4.23/4.73	107/120	7.00	2	3	45	0.6	2583-0400/2583-0450 2584-0462/2584-0512

*Specifications for reference only. Specific test data available on request.



CHARGE AIR CONNECTOR (CAC)

HOT SIDE AND COLD SIDE



This charge air connector for the hot side features 4-ply silicone coated meta-aramid fabric with stainless steel pressure retention rings.

This charge air connector for the cold side features 3-ply silicone coated polyester fabric with stainless steel pressure retention rings.

CONSTRUCTION:

- + Hot Side*: 4-ply silicone coated meta-aramid fabric with stainless steel pressure retention rings
- + Cold Side: 3-ply silicone coated polyester fabric with stainless steel pressure retention rings

SPECIFICATIONS:

- + Hot Side*: wall thickness is .085"/.135"
- + Cold Side: wall thickness is .084"/.130"

*Hot Side Hoses May be Used on Cold Side

BENEFITS

- ✓ Extreme Temperature Resistance
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ High Pressure Resistance

CUSTOM ENGINEERED TO WITHSTAND:



TEMPERATURE RANGE: HOT SIDE TEMPERATURE RANGE: COLD SIDE



* Inside & Outside Hose Temperature



CHARGE AIR CONNECTOR (CAC)– HOT SIDE

Part Number	Inside Diameter		Outside Diameter		Overall Length Inches	Convolute (Humps)	Stainless Steel Rings	Max Operating Pressure - PSI	Weight LBS	Clamp
	Inch	MM	Inch	MM						
7887	2.50	64	2.73	69	6.00	2	3	60	0.5	2583-0250 or 2584-0312
7731-0001	3.00	76	3.23	82	6.00	2	3	60	0.5	2583-0300 or 2584-0362
7733-0001	3.50	89	3.73	95	6.00	2	3	55	0.5	2583-0350 or 2584-0412
7717	3.50	89	3.73	95	7.50	2	3	55	0.5	2583-0350 or 2584-0462
7715-0002	4.00	102	4.23	107	6.00	2	3	50	0.5	2583-0400 or 2584-0462
7723	4.00	102	4.23	107	6.00	1	2	50	0.5	2583-0400 or 2584-0462
1020-0001	4.00	102	4.23	107	6.50	2	3	50	0.5	2583-0400 or 2584-0462
7716	4.00	102	4.23	107	7.00	2	3	50	0.6	2583-0400 or 2584-0462
7728	4.00	102	4.23	107	7.50	2	3	50	0.6	2583-0400 or 2584-0462
7727-0001	4.00	102	4.23	107	8.00	2	3	50	0.7	2583-0400 or 2584-0462
7742-0001	4.50	114	4.73	120	6.00	2	3	45	0.5	2583-0450 or 2584-0512
7797	5.00	127	5.23	133	6.00	2	3	35	0.5	2583-0500 or 2584-0562

*Specifications for reference only. Specific test data available on request.



CHARGE AIR CONNECTOR (CAC)– COLD SIDE

Part Number	Inside Diameter		Outside Diameter		Overall Length Inches	Convolute (Humps)	Stainless Steel Rings	Max Operating Pressure - PSI	Weight LBS	Clamp
	Inch	MM	Inch	MM						
7798-0001	3.00	76	3.23	82	6.00	2	3	60	0.5	2583-0300 or 2584-0362
7753-0001	3.50	89	3.73	95	6.00	2	3	55	0.5	2583-0350 or 2584-0412
7755-0002	4.00	102	4.23	107	6.00	2	3	50	0.5	2583-0400 or 2584-0462
7759-0001	4.50	114	4.73	120	6.00	2	3	45	0.5	2583-0450 or 2584-0512

*Specifications for reference only. Specific test data available on request.

* Hot side can also be used on cold side



HEAVY-WALL CHARGE AIR CONNECTOR (CAC)

HOT SIDE AND COLD SIDE



Exclusive to Flexfab, these heavy-wall charge air connectors feature clamp saddle design for proper clamp alignment, along with chamfered ID for easy installation. They are temperature and high pressure resistant.

CAC CONSTRUCTION:

- + 4-ply heavy duty silicone coated meta-aramid fabric with heavy duty stainless steel pressure retention rings

CAC SPECIFICATIONS:

- + Wall thickness is .117"/.163"

FLUOROCARBON LINED CHARGE AIR CONNECTOR

These connectors have a fluorocarbon liner that the other heavy wall hoses don't have. They're designed to meet EPA 2007 and EURO IV & V reduced emissions requirements.

CONSTRUCTION:

- + High temperature fluorocarbon elastomeric liner
- + 4-ply heavy duty silicone coated meta-aramid fabric with heavy duty stainless steel pressure retention rings

SPECIFICATIONS:

- + Wall thickness is .117"/.163"

BENEFITS


- ✓ Extreme Temperature Resistance
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ Custom Design
- ✓ Clamp Saddle Design Allows for Proper Clamp Alignment
- ✓ Chamfered ID is Easy to Install

CUSTOM ENGINEERED TO WITHSTAND:



TEMPERATURE RANGE:

* Inside & Outside Hose Temperature





HEAVY-WALL CHARGE AIR CONNECTOR (CAC) – HOT SIDE

Part Number	Inside Diameter		Outside Diameter		Overall Length Inches	Convolute (Humps)	Stainless Steel Rings	Max Operating Pressure - PSI	Weight LBS	Clamp
	Inch	MM	Inch	MM						
4076-0001	2.50	64	2.73	69	6.00	2	3	80	0.5	2583-0250
4074-0001	3.00	76	3.23	82	6.00	2	3	70	0.5	2588-0306
4073-0001	3.50	89	3.73	95	6.00	2	3	70	0.5	2588-0356
4070-0001	4.00	102	4.23	107	6.00	2	3	70	0.5	2588-0406
4075-0001	4.50	114	4.73	120	6.00	2	3	60	0.5	2588-0456

*Specifications for reference only. Specific test data available on request.



HEAVY-WALL CHARGE AIR CONNECTOR (CAC) – COLD SIDE

Part Number	Inside Diameter		Outside Diameter		Overall Length Inches	Convolute (Humps)	Stainless Steel Rings	Max Operating Pressure - PSI	Weight LBS	Clamp
	Inch	MM	Inch	MM						
4076-0002	2.50	64	2.73	69	6.00	2	3	80	0.5	2583-0250
4074-0002	3.00	76	3.23	82	6.00	2	3	70	0.5	2588-0306
4073-0002	3.50	89	3.73	95	6.00	2	3	70	0.5	2588-0356
4070-0002	4.00	102	4.23	107	6.00	2	3	70	0.5	2588-0406
4075-0002	4.50	114	4.73	120	6.00	2	3	60	0.5	2588-0456

*Specifications for reference only. Specific test data available on request.

* Hot side can also be used on cold side.



FLUOROCARBON LINED CHARGE AIR CONNECTOR

Part Number	Inside Diameter		Outside Diameter		Overall Length Inches	Convolute (Humps)	Stainless Steel Rings	Max Operating Pressure - PSI	Weight LBS	Clamp
	Inch	MM	Inch	MM						
1076-0003	2.50	64	2.73	69	6.00	2	3	80	0.5	2583-0250
1074-0003	3.00	76	3.23	82	6.00	2	3	70	0.5	2588-0306
1073-0003	3.50	89	3.73	95	6.00	2	3	70	0.5	2588-0356
1070-0003	4.00	102	4.23	107	6.00	2	3	70	0.5	2588-0406
1075-0003	4.50	114	4.73	120	6.00	2	3	60	0.5	2588-0456

*Specifications for reference only. Specific test data available on request.



4000 SERIES:

CHARGE AIR CONNECTOR HOSE AND CLAMP KITS

Kit Includes 1 Hose & 2 Clamps



Flexfab's 4000 series CAC hose and clamp kits feature 4-ply silicone coated meta-aramid fabric with stainless steel pressure retention rings. They perform well in extreme temperatures and have all stainless steel spring-loaded T-bolt clamps. The clamps resist salt water and can be used in marine applications.

APPLICATION:

+ Flexfab 4000 series clamp kits provide a CAC hose and 2 spring-loaded T-bolt clamps with each kit. Hoses provided in these kits are compatible with both hot or cold side of the charge air cooler system.

CONSTRUCTION:

- + Charge air connector hose, 4-ply silicone coated meta-aramid fabric with stainless steel pressure retention rings
- + All stainless steel spring-loaded T-bolt clamps

SPECIFICATIONS:

- + Charge air connector wall thickness is .085"/.135"
- + Spring-loaded T-bolt clamps: resists salt water and may be used in marine applications

BENEFITS

- ✓ Extreme Temperature Resistance
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ High Pressure Resistance
- ✓ Salt Water Resistant Clamps

CUSTOM ENGINEERED TO WITHSTAND:



COOL TEMPS



HOT TEMPS



OIL SPLASH
RESISTANCE



OZONE
RESISTANT



DIRECT
SUNLIGHT

TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



4000 SERIES: CHARGE AIR CONNECTOR HOSE AND CLAMP KITS

Part Number	Hose and Clamp Provided in Kit	Inside Diameter		Outside Diameter		Overall Length Inches	Convulutes (Humps)	Stainless Steel Rings	Max Operating Pressure - PSI
		Inch	MM	Inch	MM				
KIT4001D	4070-0001	4.00	102	4.33	107	6.00	2	3	70
	FLX2588-0406	4.06	103	4.38	111	N/A	N/A	N/A	N/A
KIT4002D	4070-0002	4.00	102	4.23	107	6.00	2	3	70
	FLX2588-0406	4.06	103	4.38	111	N/A	N/A	N/A	N/A
KIT4003D	7771-0001	4.00	102	4.23	107	8.00	2	3	50
	FLX2588-0406	4.06	103	4.38	111	N/A	N/A	N/A	N/A
KIT4004D	4073-0001	3.50	89	3.73	95	6.00	2	3	70
	FLX2588-0356	3.56	91	3.88	98	N/A	N/A	N/A	N/A
KIT4005D	4074-0001	3.00	76	3.23	82	6.00	2	3	70
	FLX2588-0306	3.06	78	3.38	86	N/A	N/A	N/A	N/A

*Specifications for reference only. Specific test data available on request.



LARGE ID CHARGE AIR CONNECTOR (CAC)



Notice: Flexfab recommends double clamping at each end for proper installation.

Designed for use on both hot and cold sides of the charge air cooler systems, this connector has 6-ply silicone coated meta-aramid fabric with stainless steel pressure retention rings. It's engineered for extreme temperatures, and is both ozone and UV resistant. Used on diesel truck engines to deliver pressurized intake air to the charge air intercooler and intake manifold.

CONSTRUCTION:

+ 6-ply silicone coated meta-aramid fabric with stainless steel pressure retention ring

SPECIFICATIONS:

+ Wall thickness is .138"/.198"

BENEFITS

- ✓ Extreme Temperature Resistance
- ✓ Can be Used on Both Hot Side or Cold Side of the Charge Air Cooler System
- ✓ Fuel and Oil Splash Resistant

CUSTOM ENGINEERED TO WITHSTAND:



TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



LARGE ID CHARGE AIR CONNECTOR (CAC)

Part Number	Inside Diameter		Outside Diameter		Overall Length Inches	Convolute (Humps)	Stainless Steel Rings	Max Operating Pressure - PSI	Weight LBS	Clamp
	Inch	MM	Inch	MM						
7968	6.00	152	6.34	161	8.00	2	3	50	1.42	2584-0662
7969	7.00	178	7.34	186	8.00	2	3	40	1.68	2584-0762
7970	8.00	203	8.34	212	8.00	2	3	40	1.92	2584-0862

*Specifications for reference only. Specific test data available on request.



7701 SERIES:

FIBERGLASS REINFORCED TURBO SLEEVES



To order (3 foot stick) reference part number: FLX7701-300
To order (12 foot stick) reference part number: FLX7701-300x12

Flexfab's fiberglass reinforced turbo sleeves resist chemicals, steam, coolants and ozone. They are engineered with 3-ply silicone coated fiberglass reinforcement and can withstand extreme temperatures.

CONSTRUCTION:

- + 3-ply silicone coated fiberglass fabric reinforcement
- + Stocked in 3' lengths
- + 12' lengths also available (please call for availability)

SPECIFICATIONS:

- + Standard wall thickness is .080"/.110"

APPLICATIONS:

- + For connection between the turbocharger and the engine (where no vibration is present)

BENEFITS

- ✓ Resists Chemicals, Steam, Ozone, Coolants, and Aging Conditions
- ✓ Extreme Temperature Resistance

CUSTOM ENGINEERED TO WITHSTAND:



COOL TEMPS



HOT TEMPS



OIL SPLASH RESISTANCE




OZONE RESISTANT



DIRECT SUNLIGHT

TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



7701 SERIES: FIBERGLASS REINFORCED TURBO SLEEVES

Part Number	Inside Diameter		Outside Diameter		Burst Pressure (PSI)	Max Operating Pressure - PSI	Weight (LB/FT)	Clamp
	Inch	MM	Inch	MM				
7701-075	0.75	19	0.94	24	135	45	0.450	2582-0010
7701-087	0.88	22	1.07	27	135	45	0.475	2582-0010
7701-100	1.00	25	1.19	30	135	45	0.500	2582-0012
7701-112	1.12	28	1.31	33	120	40	0.525	2582-0015
7701-125	1.25	32	1.44	37	120	40	0.550	2582-0138 or 2584-0175
7701-138	1.38	35	1.57	40	120	40	0.575	2582-0138 or 2584-0175
7701-150	1.50	38	1.69	43	120	40	0.600	2582-0150 or 2584-0212
7701-162	1.63	41	1.82	46	105	35	0.625	2582-0162 or 2584-0212
7701-175	1.75	44	1.94	49	105	35	0.650	2582-0175 or 2584-0212
7701-200	2.00	51	2.19	56	105	35	0.700	2582-0200 or 2584-0262
7701-225	2.25	57	2.44	62	90	30	0.750	2582-0225 or 2584-0262
7701-238	2.38	60	2.57	65	90	30	0.775	2582-0238 or 2584-0312
7701-250	2.50	64	2.69	68	90	30	0.800	2582-0250 or 2584-0312
7701-262	2.63	67	2.82	72	75	25	0.825	2582-0262 or 2584-0312
7701-275	2.75	70	2.94	75	75	25	0.850	2582-0275 or 2584-0312
7701-287	2.88	73	3.07	78	75	25	0.875	2582-0287 or 2584-0362
7701-300	3.00	76	3.19	81	75	25	0.900	2582-0300 or 2584-0362
7701-312	3.13	80	3.32	84	60	20	0.925	2582-0312 or 2584-0362
7701-325	3.25	83	3.44	87	60	20	0.950	2582-0325 or 2584-0362
7701-338	3.38	86	3.57	91	60	20	0.975	2582-0338 or 2584-0412
7701-350	3.50	89	3.69	94	60	20	1.000	2582-0350 or 2584-0412
7701-375	3.75	95	3.94	100	45	15	1.050	2582-0375 or 2584-0412
7701-400	4.00	102	4.19	106	45	15	1.100	2582-0400 or 2584-0462
7701-425	4.25	108	4.44	113	30	10	1.150	2582-0425 or 2584-0462
7701-450	4.50	114	4.69	119	30	10	1.175	2582-0450 or 2584-0512
7701-500	5.00	127	5.19	132	30	10	1.200	2582-0500 or 2584-0562
7701-600	6.00	152	6.19	157	30	10	1.300	2584-0662

*Specifications for reference only. Specific test data available on request.



7703 SERIES:

HEAVY DUTY FIBERGLASS REINFORCED TURBO SLEEVES



Constructed with 6-ply heavy duty silicone coated fiberglass reinforcement, these sleeves provide resistance to extreme temperatures, chemicals, steam, ozone, and coolants.

CONSTRUCTION:

- + 6-ply heavy duty silicone coated fiberglass fabric reinforcement
- + Stocked in 3' lengths only
- + Limited sizes available

SPECIFICATIONS:

- + Standard wall thickness is .140"/.183"

APPLICATIONS:

- + For connection between the turbocharger and the engine (where no vibration is present)

BENEFITS

- ✓ Resists Chemicals, Steam, Ozone, Coolants, and Aging Conditions
- ✓ Extreme Temperature Resistance

CUSTOM ENGINEERED TO WITHSTAND:



TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



7703 SERIES: HEAVY DUTY FIBERGLASS REINFORCED TURBO SLEEVES

Part Number	Inside Diameter		Outside Diameter		Burst Pressure (PSI)	Max Operating Pressure - PSI	Weight (LB/FT)	Clamp
	Inch	MM	Inch	MM				
7703-200	2.00	51	2.63	67	210	70	1.4	2583-0212 or 2584-0262
7703-250	2.50	64	3.13	80	180	60	1.6	2583-0262 or 2584-0312
7703-300	3.00	76	3.63	92	150	50	1.8	2583-0312 or 2584-0362
7703-350	3.50	89	4.13	105	120	40	2.0	2583-0375 or 2584-0412
7703-400	4.00	102	4.63	118	90	30	2.2	2583-0400 or 2584-0462

*Specifications for reference only. Specific test data available on request.

COMPARE 7701 VS. 7703

Flexfab Turbo Sleeve Comparison Chart					
FLX7701 Series Turbo Sleeves					
Inside Diameter	7701-200	7701-250	7701-300	7701-350	7701-400
Operating Pressure PSIG	35	30	25	20	15
Burst Pressure PSIG	105	90	75	60	45

Flexfab Turbo Sleeve Comparison Chart					
FLX7703 Series Heavy Duty Turbo Sleeves					
Inside Diameter	7703-200	7703-250	7703-300	7703-350	7703-400
Operating Pressure PSIG	70	60	50	40	30
Burst Pressure PSIG	210	180	150	120	90

The 7703 series turbo sleeves were designed to handle higher pressure standards in certain applications. The chart above references the pressure details between the standard turbo sleeves 7701 series and the heavy duty version 7703 series.

*Specifications for reference only. Specific test data available on request.



7851 SERIES:

META-ARAMID REINFORCED TURBO SLEEVES



Built to resist extreme temperatures, ozone, and UV, Flexfab's meta-aramid reinforced turbo sleeves withstand the aging conditions that can be found in hostile engine environments. Injection Molding Venting Truck Stacks and Bays Exhaust

CONSTRUCTION:

- + 4-ply silicone coated meta-aramid fabric reinforcement
- + Stocked in 3' lengths only

SPECIFICATIONS:

- + Standard wall thickness is .090"/.135"

APPLICATIONS:

- + For connection between the turbocharger and the engine

BENEFITS

- ✓ Resists Chemicals, Steam, Ozone, Coolants, and Aging Conditions
- ✓ Engineered for Hostile Engine Environments
- ✓ Extreme Temperature Resistance

CUSTOM ENGINEERED TO WITHSTAND:



COOL TEMPS



HOT TEMPS



OIL SPLASH
RESISTANCE




OZONE
RESISTANT



DIRECT
SUNLIGHT

TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



7851 SERIES: META-ARAMID REINFORCED TURBO SLEEVES

Part Number	Inside Diameter		Outside Diameter		Burst Pressure (PSI)	Max Operating Pressure - PSI	Weight (LB/FT)	Clamp
	Inch	MM	Inch	MM				
7851-100	1.00	25	1.23	31	135	45	0.50	2582-0012
7851-150	1.50	38	1.73	44	120	40	0.60	2583-0150 or 2584-0212
7851-200	2.00	51	2.23	57	105	35	0.70	2583-0200 or 2584-0262
7851-250	2.50	64	2.73	69	90	30	0.80	2583-0250 or 2584-0312
7851-300	3.00	76	3.23	82	75	25	0.90	2583-0300 or 2584-0362
7851-350	3.50	89	3.73	95	60	20	1.00	2583-0350 or 2584-0412
7851-400	4.00	102	4.23	107	45	15	1.10	2583-0400 or 2584-0462
7851-500	5.00	127	5.23	133	30	10	1.20	2583-0500 or 2584-0562
7851-600	6.00	152	6.23	158	30	10	1.30	2584-0662

*Specifications for reference only. Specific test data available on request.



2563 SERIES:

INDUSTRIAL SIL-FAB2™



Lightweight and non-kinking, Flexfab's nylon rod reinforced duct is vulcanized for long service life. It's resistant to extreme temperatures, ozone, and UV rays.

CONSTRUCTION:

- + 2-ply silicone coated fiberglass fabric with nylon rod reinforcement (no cuffs)
- + Stocked in 12' lengths only
- + Helically wound nylon fiber for flexibility

SPECIFICATIONS:

- + Vulcanized for long service life
- + Lightweight, non-kinking
- + Bend radius equals the inside diameter for hoses up to 2.50" ID
- + Bend radius equals 2 times the inside diameter for hoses 3.00" ID and over
- + Working pressure is 1/3 of the burst pressure
- + Ideal for brake duct cooling in race cars
- + Not recommended for handling liquids or abrasive materials
- + Not recommended for charge air applications

BENEFITS

- ✓ Designed for Medium Pressure Handling of Air, Dust, Fumes, and Light Powders
- ✓ For Applications in Which Metal Wire May Interfere

CUSTOM ENGINEERED TO WITHSTAND:



COOL TEMPS



HOT TEMPS



OIL SPLASH RESISTANCE



OZONE RESISTANT



DIRECT SUNLIGHT

TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



2563 SERIES: *INDUSTRIAL SIL-FAB2™*

Part Number	Inside Diameter		Outside Diameter		Burst Pressure (PSI)	Max. Neg. PSI	Max. Leakage CFM	Bend Radius (Inch)	Weight (LBS)
	Inch	MM	Inch	MM					
2563-125	1.25	32	1.65	42	27	-1	0.02	1.25	1.08
2563-200	2.00	51	2.40	61	15	-1	0.02	2.00	1.73
2563-250	2.50	64	2.90	74	15	-1	0.02	2.50	2.16
2563-300	3.00	76	3.40	86	12	-1	0.02	3.00	2.59
2563-350	3.50	89	3.90	99	12	-1	0.02	3.50	3.02
2563-400	4.00	102	4.40	112	9	-1	0.02	4.00	3.46

*Specifications for reference only. Specific test data available on request.



2005 SERIES:

INDUSTRIAL SIL-FAB2™ WIRE REINFORCED DUCT



Industrial SIL-FAB2™ wire reinforced duct is manufactured for extreme temperature resistance. Lightweight and non-kinking, it's vulcanized to last longer in hot air exhaust applications.

APPLICATIONS:

- + Injection Molding Venting
- + Truck Stacks and Bays Exhaust

CONSTRUCTION:

- + 2-ply silicone coated fiberglass fabric with wire reinforcement (no cuffs)
- + Stocked in 12' lengths only
- + Chemically treated, helically wound, spring steel wire for flexibility
- + Double, continuous filament, silicone treated fiberglass cord

SPECIFICATIONS:

- + Vulcanized for long service life
- + Lightweight, non-kinking
- + Bend radius is equal to the inside diameter of the hose
- + Working pressure is 1/3 of the burst pressure
- + Ideal for hot air exhaust
- + Used to remove semi truck engine exhaust in service bays
- + Used to exhaust hot air & fumes in injection molding operations
- + Not recommended for handling liquids or abrasive materials
- + Not recommended for charge air applications

BENEFITS

- ✓ Designed for Medium Pressure Handling of Air, Dust, Fumes, and Light Powders
- ✓ Extreme Temperature Resistance

CUSTOM ENGINEERED TO WITHSTAND:



COOL TEMPS



HOT TEMPS



OIL SPLASH
RESISTANCE



OZONE
RESISTANT



DIRECT
SUNLIGHT

TEMPERATURE RANGE:

* Inside & Outside Hose Temperature




2005 SERIES: INDUSTRIAL SIL-FAB2™ WIRE REINFORCED DUCT

Part Number	Inside Diameter		Outside Diameter		Burst Pressure (PSI)	Max. Leakage CFM	Max. Neg. PSI	Wall Thickness	Weight (OZ/FT)
	Inch	MM	Inch	MM					
2005-100	1.00	25	1.14	29	180	0.015	15	0.07	2.00
2005-125	1.25	32	1.39	35	180	0.015	15	0.07	2.50
2005-150	1.50	38	1.64	42	165	0.015	13	0.07	3.00
2005-175	1.75	44	1.89	48	165	0.02	13	0.07	3.50
2005-200	2.00	51	2.14	54	150	0.02	10	0.07	4.00
2005-225	2.25	57	2.39	61	150	0.03	10	0.07	4.50
2005-250	2.50	64	2.64	67	135	0.025	8	0.07	5.00
2005-275	2.75	70	2.89	73	135	0.025	8	0.07	6.00
2005-300	3.00	76	3.14	80	135	0.03	7	0.07	6.20
2005-325	3.25	83	3.39	86	135	0.03	6	0.07	6.70
2005-350	3.50	89	3.64	92	120	0.035	5	0.07	7.20
2005-375	3.75	95	3.89	99	120	0.035	5	0.07	7.80
2005-400	4.00	102	4.14	105	120	0.04	5	0.08	8.40
2005-450	4.50	114	4.64	118	105	0.05	4	0.08	9.60
2005-500	5.00	127	5.14	131	105	0.06	4	0.08	10.70
2005-550	5.50	140	5.64	143	90	0.08	3	0.08	11.60
2005-600	6.00	152	6.14	156	90	0.1	3	0.08	13.00
2005-800	8.00	203	8.14	207	45	0.15	3	0.08	17.80
2005-1000	10.00	254	10.14	258	24	0.2	2	0.08	22.60
2005-1200	12.00	305	12.14	308	12	0.3	2	0.08	27.10

*Specifications for reference only. Specific test data available on request.

DIAGRAM OF AIRFLOW SIL-FAB2™

Unrestricted inside diameter in bends or axial compression is only available by using SIL-FAB2™. Other flexible hoses create restricted inside diameter in bends or axial compression.

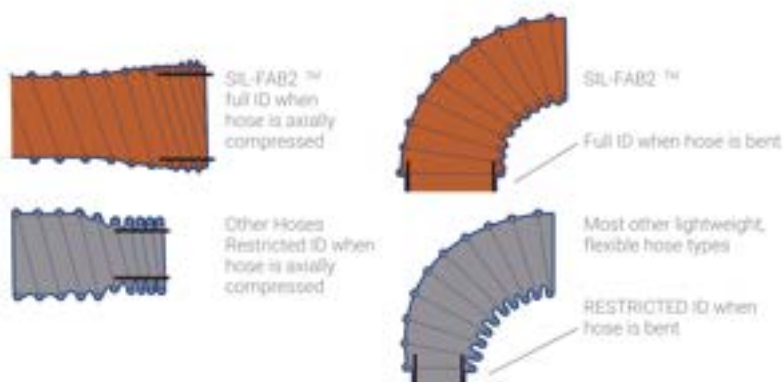



7884 AND 7896 SERIES:

90° AND 45° SILICONE ELBOWS



With dual purpose design for coolant and charge air connector systems, these silicone elbows are extreme duty cycle tested for hostile engine environments. They're constructed with low dilation design to prevent expansion.

FLEXFAB 7884 AND 7896 SERIES SERVE A DUAL PURPOSE.

- + Can be used as a coolant hose
- + Can be used as a charge air connector (CAC)

CONSTRUCTION:

- + Silicone hose with 3-ply of meta-aramid reinforcement
- + Stocked in standard lengths

SPECIFICATIONS:

- + Meets or exceeds the operating requirements of SAE J20 R1 Class A ✓
- + Meets or exceeds the operating requirements of TMC RP303B Class I Grade II ✓
- + Standard wall thickness is .140"/.190"
- + Working pressure is 1/3 of the burst pressure
- + Leg length is measured from start of bend radius to end of hose

BENEFITS

- ✓ Extreme Temperature Resistance
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ Low Dilation Design
- ✓ Prevents Expansion
- ✓ Engineered for Coolant and Charge Air Connector Systems

CUSTOM ENGINEERED TO WITHSTAND:



TEMPERATURE RANGE:

* Inside & Outside Hose Temperature





7884 SERIES: 90° SILICONE ELBOWS

Part Number	Inside Diameter		Outside Diameter		Leg Length - Inches (Avail. Clamp Space)	Bend Radius Inches	Burst Pressure - PSI		Weight LBS	Clamp
	Inch	MM	Inch	MM			SAE J20 R1	TMC		
7884-075	0.75	19	1.07	27	6.00	1.50	325	125	0.50	2582-0012
7884-100	1.00	25	1.32	34	6.00	2.00	300	125	0.50	2582-0016
7884-125	1.25	32	1.57	40	6.00	2.50	275	125	0.50	2582-0020 or 2584-0212
7884-150	1.50	38	1.82	46	6.00	3.00	250	125	0.50	2582-0024 or 2584-0212
7884-175	1.75	44	2.07	53	6.00	3.50	225	125	0.50	2582-0028 or 2584-0262
7884-200	2.00	51	2.32	59	6.00	4.00	200	100	0.50	2582-0032 or 2584-0262
7884-225	2.25	57	2.57	65	6.00	3.38	175	100	1.00	2582-0036 or 2584-0312
7884-250	2.50	64	2.82	72	6.50	3.75	150	100	1.00	2582-0040 or 2584-0312
7884-275	2.75	70	3.07	78	7.00	4.13	125	100	1.00	2582-0044 or 2584-0362
7884-300	3.00	76	3.32	84	7.50	4.50	100	100	1.00	2582-0048 or 2584-0362
7884-350	3.50	89	3.82	97	8.50	5.25	75	100	1.50	2582-0056 or 2584-0412
7884-400	4.00	102	4.32	110	9.50	6.00	50	100	1.50	2582-0064 or 2584-0462
7884-500	5.00	127	5.32	135	13.50	7.50	30	N/A	1.50	2584-0562

*Specifications for reference only. Specific test data available on request.



7896 SERIES: 45° SILICONE ELBOWS

Part Number	Inside Diameter		Outside Diameter		Leg Length - Inches (Avail. Clamp Space)	Bend Radius Inches	Burst Pressure - PSI		Weight LBS	Clamp
	Inch	MM	Inch	MM			SAE J20 R1	TMC		
7896-075	0.75	19	1.07	27	6.00	4.00	325	125	0.50	2582-0012
7896-100	1.00	25	1.32	34	6.00	4.00	300	125	0.50	2582-0016
7896-125	1.25	32	1.57	40	6.00	4.00	275	125	0.50	2582-0020 or 2584-0212
7896-150	1.50	38	1.82	46	6.00	4.00	250	125	0.50	2582-0024 or 2584-0212
7896-175	1.75	44	2.07	53	6.00	4.00	225	125	0.50	2582-0028 or 2584-0262
7896-200	2.00	51	2.32	59	6.00	4.00	200	100	0.50	2582-0032 or 2584-0262
7896-225	2.25	57	2.57	65	6.00	4.00	175	100	1.00	2582-0036 or 2584-0312
7896-250	2.50	64	2.82	72	6.50	4.00	150	100	1.00	2582-0040 or 2584-0312
7896-275	2.75	70	3.07	78	7.00	4.00	125	100	1.00	2582-0044 or 2584-0362
7896-300	3.00	76	3.32	84	7.50	4.00	100	100	1.50	2582-0048 or 2584-0362
7896-350	3.50	89	3.82	97	8.50	4.00	75	100	2.00	2582-0056 or 2584-0412
7896-400	4.00	102	4.32	110	9.50	4.00	50	100	2.50	2582-0064 or 2584-0462

*Specifications for reference only. Specific test data available on request.



7903 SERIES: REDUCERS



These reducers have dual purpose design for coolant and charge air connector systems, and are constructed for extreme temperature and pressure resistance. They withstand oil, ozone, and UV rays.

FLEXFAB 7903 SERIES REDUCERS SERVE A DUAL PURPOSE.

- + Can be used as a coolant hose
- + Can be used as a charge air connector (CAC)

CONSTRUCTION:

- + Silicone hose with 4-ply of meta-aramid reinforcement
- + Stocked in standard 6" lengths

SPECIFICATIONS:

- + Meets or exceeds the operating requirements of SAE J20 R1 Class A ✓
- + Meets or exceeds the operating requirements of TMC RP303B Class I Grade II ✓
- + Standard wall thickness is .170"/.220"
- + Working pressure is 1/3 of the burst pressure
- + Resists hardening, cracking, cold leaks, aging, and many chemicals
- + Ideal for extreme temperature and various pressure ranges where high performance levels are required
- + Resists chemicals, steam, ozone, coolants, and aging conditions normally found in the engine environment

BENEFITS

- ✓ Extreme Temperature Resistance
- ✓ Extreme Duty Cycle Tested for Hostile Engine Environments
- ✓ High Pressure Resistance
- ✓ Engineered for Coolant and Charge Air Connector Systems

CUSTOM ENGINEERED TO WITHSTAND:



COOL TEMPS



HOT TEMPS



OIL SPLASH
RESISTANCE




OZONE
RESISTANT



DIRECT
SUNLIGHT

TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



7903 SERIES: REDUCERS

Part Number	Inside Diameter		Outside Diameter		Overall Length Inches	Burst Pressure - PSI		Weight (LBS)	Clamp
	Inch	MM	Inch	MM		SAE J20 R1	TMC		
FLX7903-100125	1.00/1.25	25/32	1.39/1.64	35/42	6.00	275	125	0.5	2582-0016/2582-0020 2584-0175/2584-0212
FLX7903-100150	1.00/1.50	25/38	1.39/1.89	35/48	6.00	250	125	0.5	2582-0016/2582-0024 2584-0175/2584-0212
FLX7903-100175	1.00/1.75	25/44	1.39/2.14	35/54	6.00	225	125	0.5	2582-0016/2582-0028 2584-0175/2584-0262
FLX7903-100200	1.00/2.00	25/51	1.39/2.39	35/61	6.00	200	100	0.5	2582-0016/2582-0032 2584-0175/2584-0262
FLX7903-125200	1.25/2.00	32/51	1.64/2.39	42/61	6.00	200	100	0.5	2582-0020/2582-0032 2584-0175/2584-0262
FLX7903-150200	1.50/2.00	38/51	1.89/2.39	48/61	6.00	200	100	0.5	2582-0024/2582-0032 2584-0212/2584-0262
FLX7903-175200	1.75/2.00	44/51	2.14/2.39	54/61	6.00	200	100	0.5	2582-0028/2582-0032 2584-0262/2584-0262
FLX7903-200225	2.00/2.25	51/57	2.39/2.64	61/67	6.00	175	100	0.5	2582-0032/2582-0036 2584-0262/2584-0312
FLX7903-200250	2.00/2.50	51/64	2.39/2.89	61/73	6.00	150	100	0.5	2582-0032/2582-0040 2584-0262/2584-0312
FLX7903-200275	2.00/2.75	51/70	2.39/3.14	61/80	6.00	125	100	0.5	2582-0032/2582-0044 2584-0262/2584-0362
FLX7903-200300	2.00/3.00	51/76	2.39/3.39	61/86	6.00	100	100	0.5	2582-0032/2582-0048 2584-0262/2584-0362
FLX7903-225250	2.25/2.50	57/64	2.64/2.89	67/73	6.00	150	100	0.5	2582-0036/2582-0040 2584-0312/2584-0312
FLX7903-225275	2.25/2.75	57/70	2.64/3.14	67/80	6.00	125	100	0.5	2582-0036/2582-0044 2584-0312/2584-0362
FLX7903-225300	2.25/3.00	57/76	2.64/3.39	67/86	6.00	100	100	0.5	2582-0036/2582-0048 2584-0312/2584-0362
FLX7903-250275	2.50/2.75	64/70	2.89/3.14	73/80	6.00	125	100	0.5	2582-0040/2582-0044 2584-0312/2584-0362
FLX7903-250300	2.50/3.00	64/76	2.89/3.39	73/86	6.00	100	100	0.5	2582-0040/2582-0048 2584-0312/2584-0362
FLX7903-250350	2.50/3.50	64/89	2.89/3.89	73/99	6.00	75	100	0.5	2582-0040/2582-0056 2584-0312/2584-0412
FLX7903-275300	2.75/3.00	70/76	3.14/3.39	80/86	6.00	100	100	0.5	2582-0044/2582-0048 2584-0362/2584-0362
FLX7903-300350	3.00/3.50	76/89	3.39/3.89	86/99	6.00	75	100	0.5	2582-0048/2582-0056 2584-0362/2584-0412
FLX7903-300400	3.00/4.00	76/102	3.39/4.39	86/112	6.00	50	100	0.5	2582-0048/2582-0064 2584-0362/2584-0462
FLX7903-350400	3.50/4.00	89/102	3.89/4.39	99/112	6.00	50	100	0.5	2582-0056/2582-0064 2584-0412/2584-0462
FLX7903-400500	4.00/5.00	102/127	4.39/5.39	112/137	6.00	N/A	N/A	0.5	2584-0462/2584-0562

*Specifications for reference only. Specific test data available on request.



5531 SERIES:

LOW PRESSURE SILICONE TUBING



Flexfab's durable low pressure silicone tubing withstands extreme temperatures in low pressure vacuum advance, windshield washer fluid, transmission modulator, and emission control applications.

APPLICATION:

- + Designed for low pressure vacuum advance, windshield washer fluid, transmission modulator and emission control

CONSTRUCTION:

- + Silicone hose without reinforcement
- + Available in: 
- + Stocked in 25' boxes

BENEFITS

- ✓ Long Life Silicone
- ✓ Extreme Temperature Resistance
- ✓ Durable and Long Lasting

CUSTOM ENGINEERED TO WITHSTAND:



COOL TEMPS



HOT TEMPS



OIL SPLASH
RESISTANCE



OZONE
RESISTANT



DIRECT
SUNLIGHT

TEMPERATURE RANGE:

* Inside & Outside Hose Temperature



5531 SERIES: LOW PRESSURE SILICONE TUBING

Part Number	Inside Diameter		Outside Diameter		Wall Thickness	Weight (LB/FT)
	Inch	MM	Inch	MM		
5531-012	0.13	3.18	0.23	6	.045/.055	0.0162
5531-018	0.19	4.75	0.35	9	.075/.085	0.0379
5531-025	0.25	6.35	0.45	11	.095/.105	0.0609
5531-031	0.31	7.92	0.55	14	.115/.125	0.0892
5531-038	0.38	9.53	0.68	17	.145/.155	0.1342

*Specifications for reference only. Specific test data available on request.

Temperature in Fahrenheit	Temperature in Celsius	Expected Life
<266°F	<130°C	Several Years
302°F	150°C	1.5 Years
392°F	200°C	8 Months
482°F	250°C	3 Months
572°F	300°C	10 Days

Media: hot air with continuous exposure
This information is for reference ONLY and is not a guarantee.



36519 SERIES:

BEADED CONNECTORS



Use Flexfab's beaded connectors in coolant, charge air and marine applications. They're constructed with anodized aluminum to resist salt water damage and withstand extreme temperatures, oil, ozone, and UV rays. These beaded connectors feature anodized aluminum construction and are corrosion resistant.

CONSTRUCTION:

- + Bead height per AS5131 specification
- + Meets anodized aluminum specification MIL-A8625 

BENEFITS

- ✓ Customizable Capabilities - Add to Hose Length or Change Hose Shape
- ✓ Anodized Aluminum Construction Corrosion Resistance
- ✓ Extreme Temperature Resistance

36519 SERIES: *BEADED CONNECTORS*

Part Number Beaded Con- nectors	Outside Diameter		Bead Height (AS5131)	Overall Length Inches	Weight LBS
	Inch	MM			
DEA-36519-0625	0.63	16	.047 - .067	3.00	0.50
DEA-36519-0750	0.75	19	.047 - .067	3.00	0.50
DEA-36519-1000	1.00	25	.047 - .067	3.00	0.30

*Specifications for reference only.



2582 SERIES:

LINED WORM GEAR CLAMPS



Constructed with all 300 grade stainless steel, the lining of these clamps protects the hose surface and prevents silicone from shearing through band notches. The clamps are salt water resistant, making them an ideal solution for marine applications.

APPLICATION:

- + For charge air connector (CAC) applications

CONSTRUCTION:

- + Lined clamps are designed for use with silicone rubber and other soft hose applications. The liner protects the hose surface and prevents it from extruding or shearing through the band notches as the clamp is tightened.
- + Please call for availability

SPECIFICATIONS:

- + All 300 grade stainless steel lined worm gear clamps
- + Hex Head: 5/16"
- + Band Width: 9/16"

BENEFITS

- ✓ Recommended for Silicone Coolant Hose, Heater Hose, Marine, and Silicone Tubing
- ✓ Durable and Long Lasting
- ✓ Salt Water Resistant


2582 SERIES: *LINED WORM GEAR CLAMPS*

Part Number - Clamps Lined Worm Gear	Min. Dia. (in.)	Max. Dia. (in.)	Min. Dia. (mm)	Max. Dia. (mm)	Pack Size	Weight LBS- Per 10
FLXQ582-0004	0.3125	0.625	8	16	10	0.5
FLXQ582-0006	0.50	0.88	13	22	10	0.5
FLXQ582-0008	0.63	1.00	16	25	10	0.5
FLXQ582-0010	0.75	1.06	19	27	10	0.5
FLXQ582-0012	0.88	1.25	22	32	10	0.5
FLXQ582-0016	1.00	1.50	26	38	10	0.5
FLXQ582-0020	1.13	1.75	29	44	10	0.5
FLXQ582-0024	1.25	2.00	32	51	10	0.5
FLXQ582-0028	1.31	2.25	33	57	10	0.5
FLXQ582-0032	1.56	2.50	40	63	10	0.5
FLXQ582-0036	1.81	2.75	46	70	10	0.5
FLXQ582-0040	2.06	3.00	52	76	10	0.5
FLXQ582-0044	2.31	3.25	59	82	10	0.5
FLXQ582-0048	2.56	3.50	65	89	10	0.5
FLXQ582-0052	2.81	3.75	72	95	10	0.5
FLXQ582-0056	3.06	4.00	78	101	10	0.5
FLXQ582-0060	3.31	4.25	84	108	10	0.5
FLXQ582-0064	3.56	4.50	91	114	10	1
FLXQ582-0072	4.06	5.00	103	127	10	1

*Specifications for reference only

COOLANT AND HEATER HOSE CLAMPING INSTRUCTIONS:

Worm gear or constant torque type stainless steel clamps with inner liner are recommended for silicone heater and coolant hose. Initial clamp torque should be 40 inch-lbs. If re-torqueing is required, it should be limited to 20 inch-lbs. Do not use serrated, slotted, or wire type clamps.

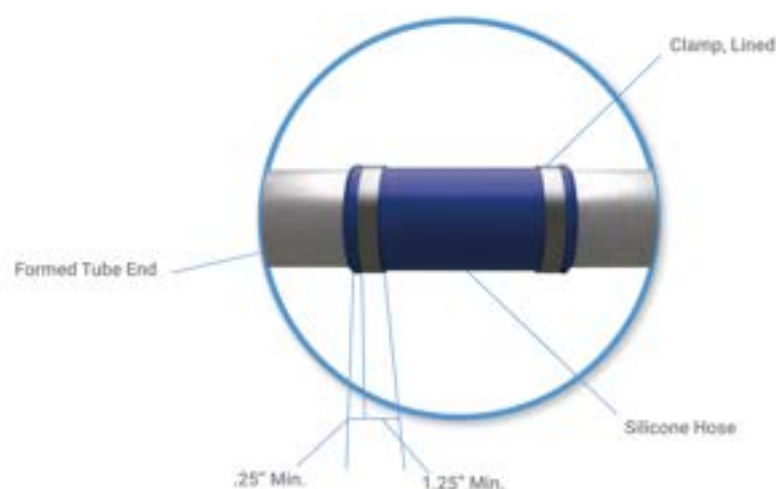



2584 SERIES:

CONSTANT TENSION CLAMPS



An ideal solution for silicone coolant hose, heater hose, and marine connections, constant tension clamps provide a uniform 360° seal. They are constructed to respond to constant temperature fluctuations and resist extreme temperatures.

APPLICATION:

- + For charge air connector (CAC) applications

CONSTRUCTION:

- + All 300 grade stainless steel constant tension lined clamps
- + Hex Head: 3/8"
- + Band Width: 5/8"
- + Resists salt water and may be used in marine applications
- + Liner protects the hose surface and prevents silicone from shearing through band notches

BENEFITS

- ✓ Lined Clamp Design
- ✓ Belleville Spring and Clamp Construction is Designed to Respond to Constant Temperature Fluctuations
- ✓ Ideal for Silicone Coolant Hose, Heater Hose, and Marine Connections
- ✓ Provides Uniform 360° Seal


2584 SERIES: CONSTANT TENSION CLAMPS

Part Number - Clamps Constant Tension	Min. Dia. (in.)	Max. Dia. (in.)	Min. Dia. (mm)	Max. Dia. (mm)	Pack Size	Weight LBS- Per 10
FLX2584-0175	1.00	1.75	25	45	10	2
FLX2584-0212	1.25	2.13	32	54	10	2
FLX2584-0262	1.75	2.63	45	67	10	2
FLX2584-0312	2.25	3.13	57	79	10	2
FLX2584-0362	2.75	3.63	70	92	10	2
FLX2584-0412	3.25	4.13	83	105	10	2.5
FLX2584-0462	3.75	4.63	95	117	10	2.5
FLX2584-0512	4.25	5.13	108	130	10	2.5
FLX2584-0562	4.75	5.63	121	143	10	2.5
FLX2584-0612	5.25	6.13	133	155	10	2.5
FLX2584-0662	5.75	6.63	146	168	10	3
FLX2584-0712	6.25	7.13	159	181	10	3
FLX2584-0762	6.75	7.63	172	193	10	3
FLX2584-0812	7.25	8.13	184	206	10	3
FLX2584-0862	7.75	8.63	197	219	10	3
FLX2584-0912	8.25	9.13	210	232	10	3.5

*Specifications for reference only

COOLANT AND HEATER HOSE CLAMPING INSTRUCTIONS:

Worm gear or constant torque type stainless steel clamps with inner liner are recommended for silicone heater and coolant hose. Initial clamp torque should be 40 inch-lbs. If re-torqueing is required, it should be limited to 20 inch-lbs. Do not use serrated, slotted, or wire type clamps.

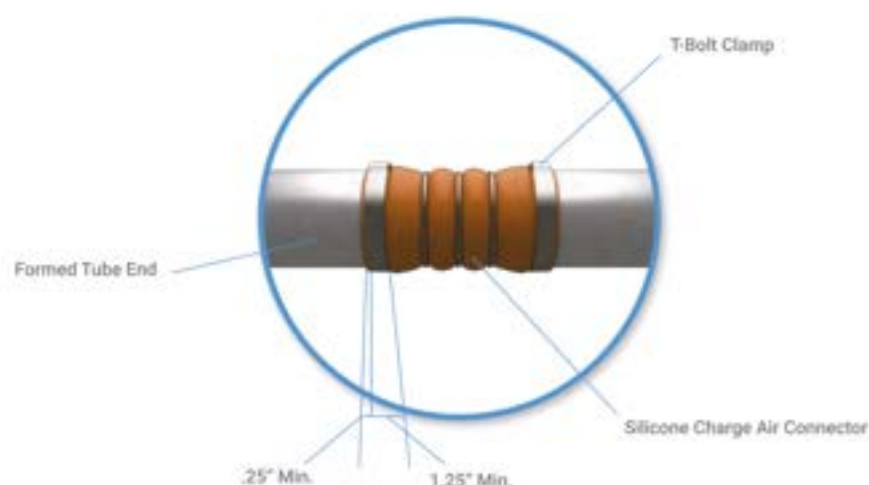



2583 SERIES: T-BOLT CLAMPS



These clamps provide a positive, uniform seal for high-vibration applications, including marine.

APPLICATION:

- + For charge air connector (CAC) applications and turbo charger sleeves
- + Heavy-duty T-bolt clamps provide uniform sealing pressure for a positive, reliable seal. Designed for use in high vibration applications in heavy-duty trucks, industrial machinery, off-road equipment, agricultural irrigation equipment and machinery.

CONSTRUCTION:

- + Features a 3/4" wide stainless steel band with welded construction for reliability.
- + All 300 grade stainless steel T-bolt clamps
- + Please call for availability

SPECIFICATIONS:

- + Hex Head: 7/16" with nylon insert
- + Band Width: 3/4"
- + Resists salt water and may be used in marine applications

BENEFITS

- ✓ Recommended for Coolant Hose, CAC hose, Turbo Sleeves, Marine Hose, 90° and 45° Degree Elbows, and SILFAB™ Ducting sleeves
- ✓ Salt Water Resistant
- ✓ Clamp Provides a Uniform 360° Seal


2583 SERIES: T-BOLT CLAMPS

Part Number - Clamps T-Bolt	Min. Dia. (in.)	Max. Dia. (in.)	Min. Dia. (mm)	Max. Dia. (mm)	Pack Size	Weight LBS- Per 10
FLX2583-0138	1.38	1.56	35	39	10	1
FLX2583-0150	1.50	1.63	38	42	10	1.5
FLX2583-0163	1.63	1.88	41	46	10	1.5
FLX2583-0175	1.75	2.00	45	51	10	1.5
FLX2583-0188	1.88	2.19	48	56	10	1.5
FLX2583-0200	2.00	2.31	51	59	10	1.5
FLX2583-0213	2.13	2.44	54	62	10	1.5
FLX2583-0225	2.25	2.56	57	65	10	1.5
FLX2583-0238	2.38	2.69	61	68	10	1.5
FLX2583-0250	2.50	2.81	64	71	10	1.5
FLX2583-0263	2.63	2.94	67	75	10	1.5
FLX2583-0275	2.75	3.06	70	78	10	1.5
FLX2583-0288	2.88	3.19	73	81	10	1.5
FLX2583-0300	3.00	3.31	76	84	10	1.5
FLX2583-0313	3.13	3.44	80	87	10	1.5
FLX2583-0325	3.25	3.56	83	90	10	1.5
FLX2583-0338	3.38	3.69	86	94	10	1.5
FLX2583-0350	3.50	3.81	89	97	10	1.5
FLX2583-0363	3.63	3.94	92	100	10	1.5
FLX2583-0375	3.75	4.06	95	103	10	1.5
FLX2583-0400	4.00	4.31	102	110	10	2
FLX2583-0425	4.25	4.56	108	116	10	2
FLX2583-0450	4.50	4.81	114	122	10	2
FLX2583-0475	4.75	5.06	121	129	10	2
FLX2583-0500	5.00	5.31	127	135	10	2

*Specifications for reference only

CAC AND TURBO CHARGER HOSE CLAMPING INSTRUCTIONS:

Use only T-bolt style clamps. Constant torque T-bolt style clamps may help retain clamp load. Torque clamps to 70-75 inch-lbs.

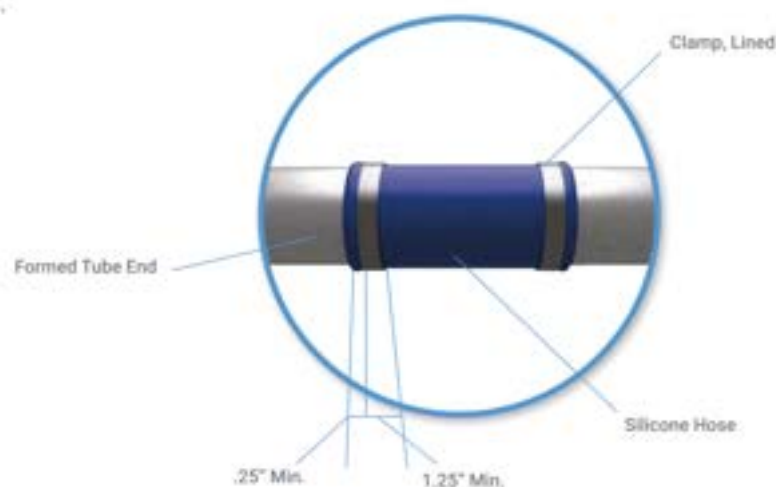



2588 SERIES:

SPRING LOADED T-BOLT CLAMPS



These T-Bolt Clamps provide consistent band tension and compensate for fluctuations that can happen in hose line assemblies. They resist salt water, and temperature and/or pressure changes.

APPLICATION:

+ For charge air connector (CAC) applications

SPECIFICATIONS:

- + All 316 grade stainless steel spring-loaded T-bolt clamps
- + Hex Head: 5/16"
- + Band Width: 3/4"
- + Resists salt water and may be used in marine applications

BENEFITS

- ✓ Spring Loaded T-Bolt Clamps are Designed to Compensate for Fluctuations in Hose Line Assemblies
- ✓ Spring Loaded T-Bolt Clamps Adjust to Temperature and/or Pressure Changes to Provide Constant Band Tension
- ✓ Recommended for Silicone Coolant Hose, CAC Hose, Turbo Sleeves, Marine Hose, 90° and 45° Degree Elbows, and SILFAB™ Ducting


2588 SERIES: SPRING LOADED T-BOLT CLAMPS

Part Number - Clamps Spring Loaded T-Bolt	Min. Dia. (in.)	Max. Dia. (in.)	Min. Dia. (mm)	Max. Dia. (mm)	Pack Size	Weight LBS- Per 10
FLX2588-0306	3.0625	3.375	77.8	85.7	10	2
FLX2588-0356	3.562	3.875	90.5	98.4	10	2
FLX2588-0406	4.0625	4.375	103.2	111.1	10	2
FLX2588-0456	4.562	4.875	115.9	123.8	10	2
FLX2588-0506	5.0625	5.375	128.59	136.53	10	2

*Specifications for reference only.

CAC AND TURBO CHARGER HOSE CLAMPING INSTRUCTIONS:

Use only T-bolt style clamps. Constant torque T-bolt style clamps may help retain clamp load. Torque clamps to 70-75 inch-lbs.

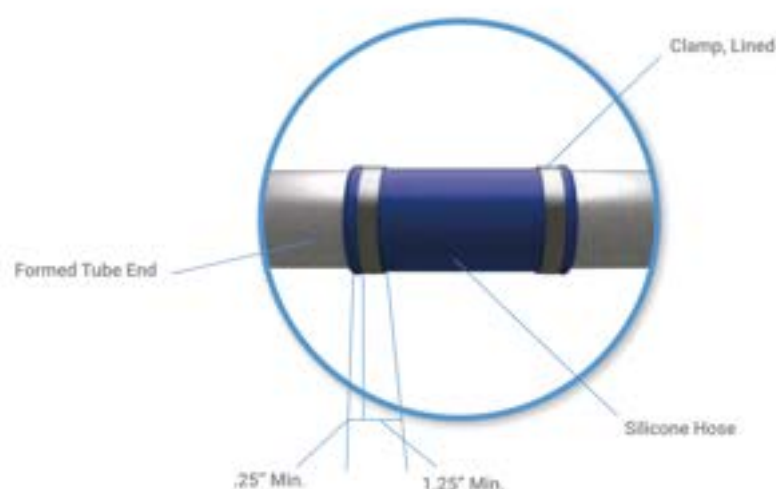



SILICONE DAIRY HOSE



Product Benefits

- ✓ Durable Construction
- ✓ Translucent Design
- ✓ Extreme Temperature Resistance
- ✓ Superior Clamp Retention
- ✓ Food Grade Material
- ✓ Tasteless, Odorless, Non-Toxic

Lasts Longer than Organic Hose



UV
Resistant



Translucent
For Flow
Monitoring



Superior Clamp
Retention

Extreme Temp Resistance*



177°C
-55°C



350°F
-67°F

* Inside & Outside Hose Temperature

REGULATORY REQUIREMENTS MET



- ✓ 3A Sanitary Standard 18-03 Class IV



- ✓ FDA 21CFR 177.2600

Technical Details

PART NUMBER	Outside Diameter		Inside Diameter	Wall thickness	Length	Weight per ft
	Inch	MM				
DAI1003-0001	1.03	26	.600" to .650"	.175" to .225"	100'	.260 lb/ft
DAI1005-0001	1.07	27	.610" to .650"	.195" to .240"	100'	.297 lb/ft
DAI1002-0001	1.24	31	.720" to .780"	.225" to .265"	100'	.432 lb/ft
DAI1002-0002	1.37	35	.845" to .905"	.225" to .265"	50'	.502 lb/ft

Contact Us For Additional Size Information
Quoted lead time part

Safe Cleaning Agents




✓ Sanitize with Standard Cleaning Methods

Alkaline Cleaners
Chlorinated Cleaners
Acidic Rinse
Steam Exposure

Don't Risk Downtime, **Choose Silicone**

HOW DOES A COOLING SYSTEM WORK?

The cooling system is made up of the passages inside the engine block and heads, a pump to circulate the coolant, a thermostat to control the temperature of the coolant, a radiator to cool the coolant, a radiator cap to control the pressure in the system, and some plumbing consisting of interconnecting hoses (Flexfab hoses). These hoses transfer the coolant from the engine to radiator and also to the heater system, where hot coolant is used to warm up the vehicle interior on a cold day. The diagram below shows the flow of coolant with a down flow radiator:

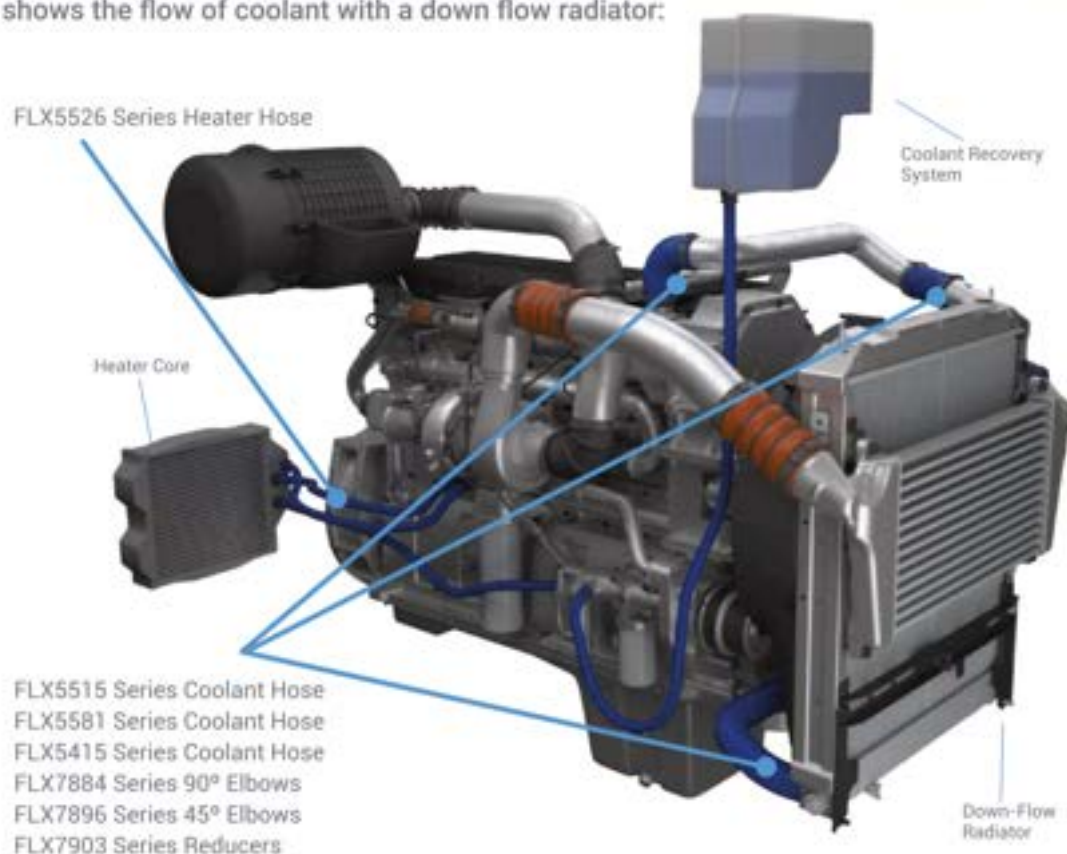


There are several hoses that make up the plumbing to connect the components of the cooling system. The main hoses are called the upper and lower radiator hoses. These two hoses direct coolant between the engine and the radiator. Two additional hoses, called heater hoses, supply hot coolant from the engine to the heater core. These hoses are designed to withstand the pressure inside the cooling system. Because of this, they are subject to wear and tear and eventually may require replacing as part of routine maintenance.

FOR REFERENCE ONLY

CHARGE AIR COOLING PROCESS

A very important component to overall engine efficiency

The charge air cooler and turbocharger are part of a high tech induction system that increases engine combustion efficiency. The turbocharger uses exhaust gases to compress air before it enters the charge air cooler. The compressed air going through the charge air cooler is then cooled by the ambient air flowing across the cooler fins. The cooled air is denser than warm air, so when it flows into the intake side of the engine, the increased density improves horsepower, fuel economy and reduces emissions. The following illustration provides a clear view of the components associated with the charge air cooler and how the air flows through the system:

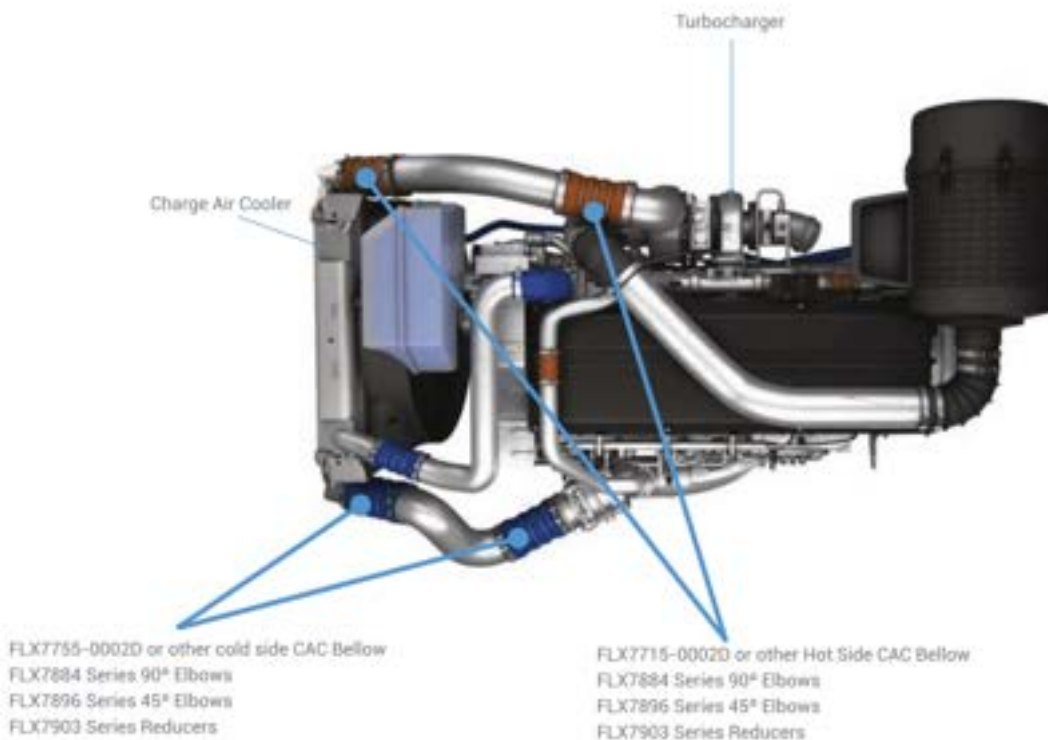

Charge air cooler systems can develop leaks and can fail if the leaks are not caught. A leaking charge air cooler system can cause the engine to lose up to ½ mpg in fuel economy. To maintain engine power and fuel efficiency, it is important to properly maintain all charge air cooler systems.

FOR REFERENCE ONLY